





MJ-GERÜST
Scaffolding Systems

**SCAFFOLD MADE IN
PLETTENBERG**

COMBI

PRICES | EDITION 01.2022

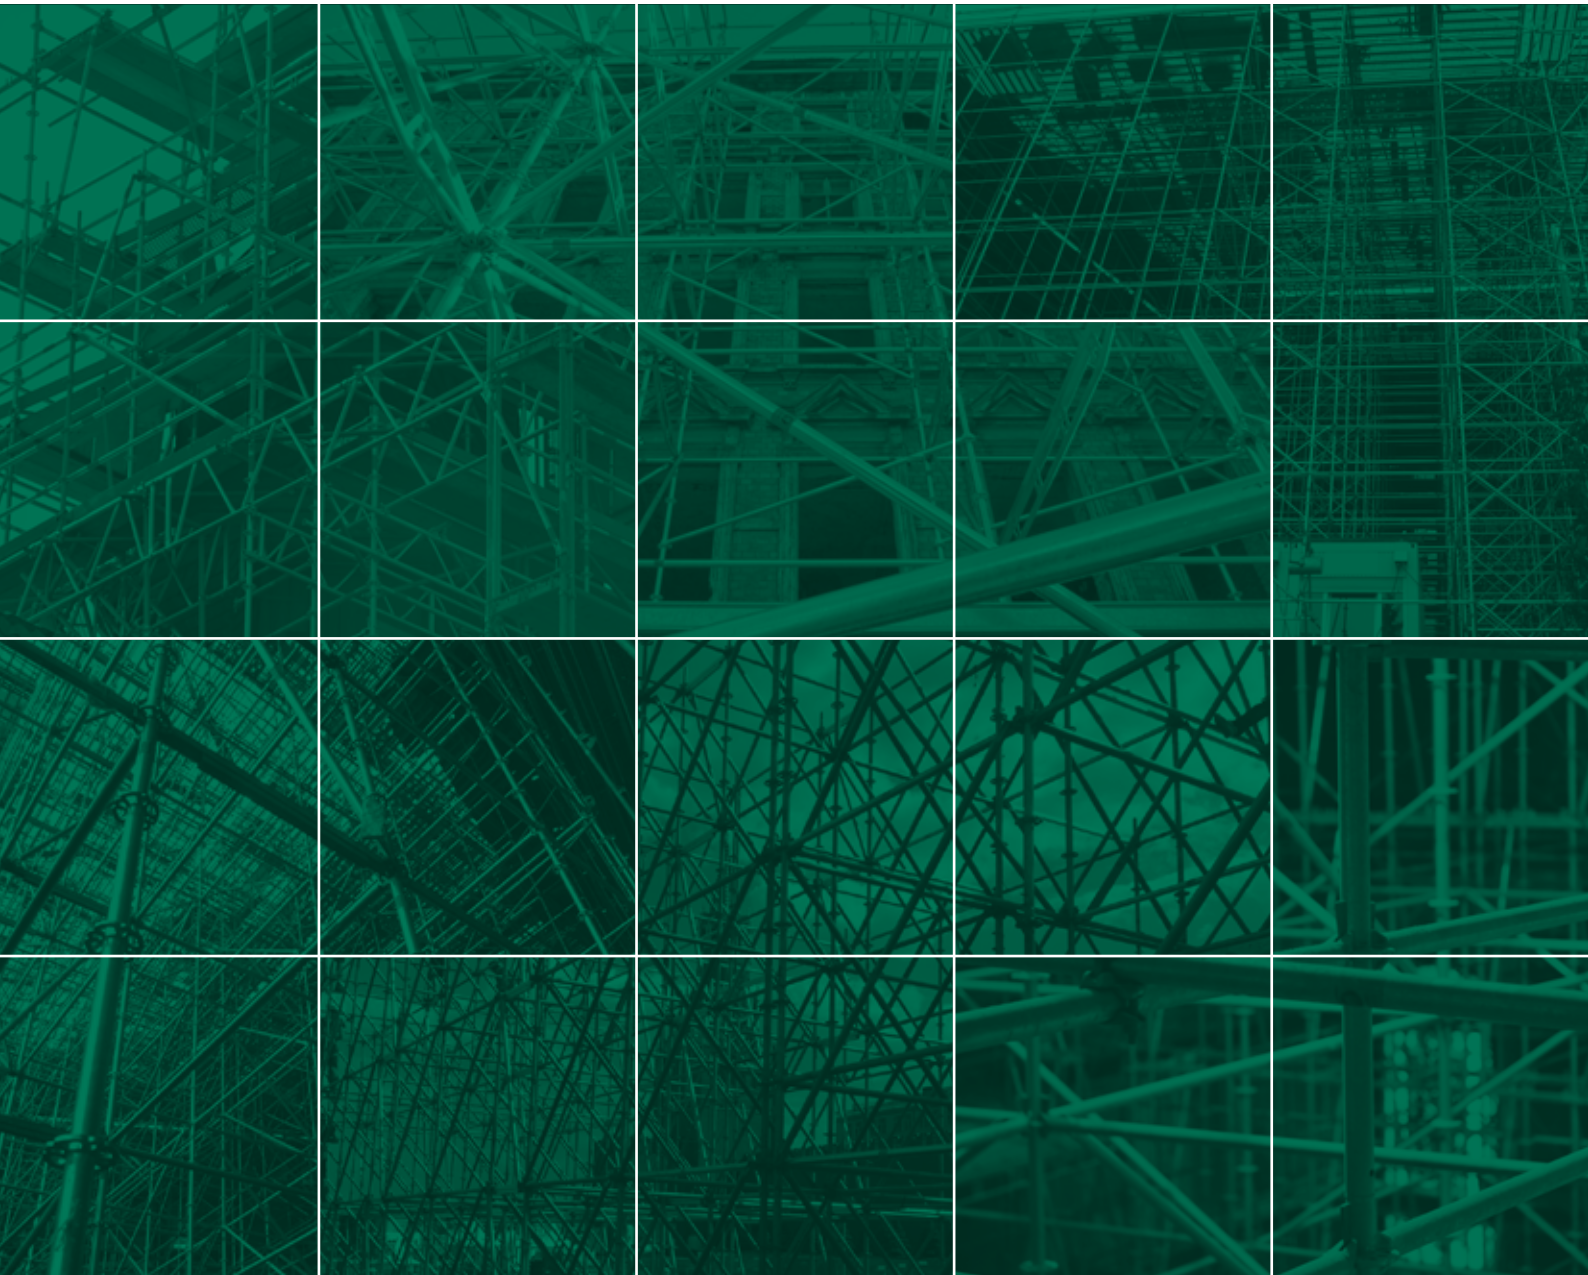

SCAFFOLDINGS MADE IN PLETTENBERG

MJ-Gerüst GmbH, based in Plettenberg in the German region of Sauerland, is part of a strong group of companies, which can look back on more than 50 years of company history. The core competence of the family company lies in the production and worldwide distribution of high-quality steel and aluminum scaffolding systems, which offer almost limitless possibilities in the field of modern system scaffolding construction.

With a unique range of products and a wide range of universal accessories, we offer our customers the option of completing existing scaffolding material in a system-compatible complement. A highly valued advantage by our customers that has given our scaffolding international recognition and prominence.


Development, production and sales. These are the cornerstones of our range of services, which are supplemented by numerous additional services. Especially our support in the planning and implementation of difficult projects is claimed. A service in which our technical know-how and experience can often contribute to considerable time and cost savings.

Only through qualified work can a safe quality product be created. Our proven quality management reflects our knowledge and experience and makes the quality of our products measurable. In order to guarantee our high quality standards, our production processes are constantly accompanied by external examination offices and engineers.




UNI-CONNECT

07er Frame scaffold




UNI

Metric frame scaffold




UNI TOP

Metric frame scaffold




COMBI

Modular scaffold



OPTIMA

Flexible façade scaffolding



ACCESSORIES

Universal

OUR COMPANY - YOUR BENEFITS

- Production in Germany at the location Plettenberg
- System compatible, high quality and norm compliant scaffold systems
- Certifications according to DIN EN 9001, 14001 and 50001
- Highest product quality through dynamic quality management
- Short-term availability of material due to high storage capacities and short decision-making processes
- Use of the modern production technology and permanent optimization of technological production running
- Project support already in the planning phase

Certifikat SC0148-19 | utgåva 1 | 2020-05-07
RISE Research Institutes of Sweden AB | Certifiering
Box 857, 501 15 Borås
☎ +46 10 516 50 00 | certifiering@ri.se | www.ri.se



BUNDESINNUNG
GERÜSTBAU



SGUV Schweizerischer Gerüstbau-Unternehmen-Verband
SESE Società dei Entrepreneur Suisse en Echafaudages
SISP Società degli Imprenditori Italiani dei Ponteggi



The system	04
Superior load values	06
Vertical standards	08
Protection / Protective elements	11
Horizontal ledgers	12
Diagonal bracing	18
Horizontal diagonal bracing	20
Decks	22
Climb up	28
Stair tower	36
Deck fastenings	40
Toe boards	42
Brackets	45
Base jacks	48
Couplers	50
Anchoring	53
Securing during assembly of the scaffold	54
Storage and transport	56
Notes	57
Order form	59

 Made in Plettenberg

 Net price, not discountable

 European standard

 Grant BG BAU

 Individual identification

 Delivery time on request

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. An excerpt: place of business and jurisdiction is Plettenberg. Extended retention of title until full payment of all outstanding claims. Our prices are ex works.

COMBI: FAST - STRONG - FLEXIBLE

With the modular scaffolding COMBI, we have developed a system that covers all requirements of constructive scaffolding. COMBI is based on the proven and flexible functionality of the modular perforated disc. For the construction of the knot design, we used the finite element method (FEM) in order to achieve stress-optimized lifting capacity and weight reduction at the same time. In addition, this resulted in an optimized load application via the ledgers into the standards.

As a result, the COMBI convinces with its exceptional static values. With up to eight connections per knot – freely selectable in heights of 0.50 m intervals – the system offers the highest possible variability in constructing a modular scaffold. The small notches of the perforated disc are used to connect the ledgers and enforce a 90-degree angle, which is required for many forms of application.

In connection with the larger notches arranged in between, the system also offers variable assembly options for angles outside the 90-degree. The decisive benefit of the modular scaffold – apart from the freely definable angles of knots – is the option for individual selection of bay lengths, widths and level heights. This enables flexible adjustments to virtually any type of building or construction.

**EFFICIENT**

due to optimized
ease of assembly

**PROFITABLE**


through long life and
excellent value retention

**FLEXIBLE**

through countless
field lengths/widths

**VERSATILE**

through extensive
range of accessories

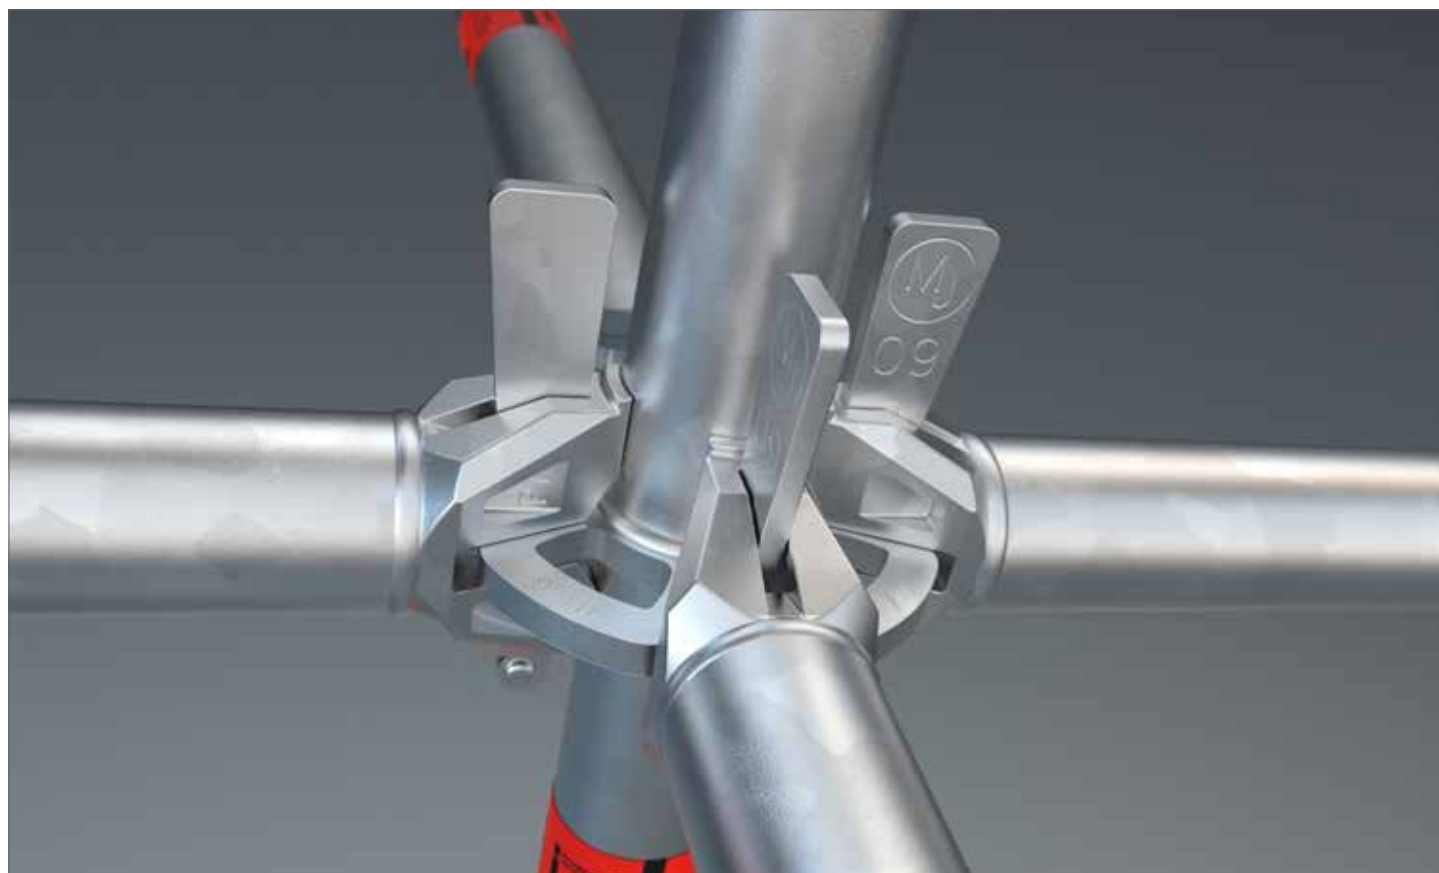

THE ESSENTIAL BENEFITS OF THE SYSTEM IN OVERVIEW

There are many reasons for choosing the COMBI modular scaffolding system: not least of these is its extensive range of series-manufactured components, for example, crossbars and diagonals in more than 100 different lengths, as well as brackets in various widths - making the COMBI an 'allrounder' in its field. The use of system base crossbars allows standard scaffolding decks of various facade scaffold systems to be integrated without any difficulty.

Gen. approved by building inspection, also for common, manufacturer independent use. For details on type and scope, please refer to the approval models: Z-8.22-921, Z-8.22-923, Z-8.22-926, Z-8.22-960.



Visit us on



WWW.GERUESTLAGER.DE

COMBI, STEEL: LOAD CAPACITY																			
Ledger type	O-ledger													O-ledger reinforced	O-double ledger				
Ledger length (system dimension) [m]	0.39	0.42	0.73	1.04	1.09	1.29	1.40	1.54	1.57	2.07	2.57	3.07	4.14	1.09	1.29	1.57	2.07	2.57	3.07
Evenly distributed line load (q) [kN/m]	80.7	70.0	24.3	12.7	11.6	8.5	7.3	6.1	5.9	3.5	2.3	1.6	0.9	18.5	16.8	14.9	9.9	7.5	5.3
Single load (P) in the centre of the bay [kN]	17.3	15.9	9.0	6.4	6.1	5.2	4.9	4.5	4.3	3.4	2.7	2.3	1.7	12.1	9.5	14.4	9.8	7.5	5.5
Ledger type	U-ledger*					U-ledger reinforced*					U-double ledger*								
Ledger length (system dimension) [m]	0.42		0.73		1.04		1.09		1.4		1.54		1.57		2.07		2.57		3.07
Evenly distributed line load (q) [kN/m]	61.1		23.6		13.06		16.9		12.6		11.5		14.3		9.6		7.2		5.5
Single load (P) in the centre of the bay [kN]	13.9		9.4		6.7		12.3		9.4		8.6		13.1		8.9		8.2		5.7

COMBI METRIC, STEEL: LOAD CAPACITY																				
Ledger type	O-ledger													O-ledger reinforced		O-double ledger				
Ledger length (system dimension) [m]	0.25	0.41	0.5	0.74	0.75	1.0	1.1	1.25	1.39	1.5	2.0	2.5	3.0	4.0	1.39	1.5	1.5	2.0	2.5	3.0
Evenly distributed line load (q) [kN/m]	174.0	72.0	50.0	23.9	23.3	13.6	12.1	8.9	7.3	6.4	3.7	2.4	1.7	0.9	14.7	12.9	16.1	10.5	7.7	5.7
Single load (P) in the centre of the bay [kN]	27.5	16.2	13.3	8.9	8.8	6.7	6.3	5.4	4.9	4.5	3.5	2.8	2.4	1.8	11.3	8.1	15.9	10.4	8.1	5.7

COMBI, STEEL: PERMISSIBLE LOAD CLASSES FOR DECK LEVELS								
Ledger length [m]	Bay length L [m] - double-sided (d) - single-sided (s)							
	1.57		2.07		2.57		3.07	
	d	s	d	s	d	s	d	s
O-ledger reinforced								
1.09	6	6	6	6	5	6	5	6
1.29	6	6	6	6	5	6	5	6
O-double ledger								
1.57	6	6	5	6	5	6	4	6
2.07	5	6	4	6	4	5	3	5
2.57	4	6	4	5	3	5	3	4
3.07	3	5	3	4	2	4	1	3

COMBI METRIC, STEEL: PERMISSIBLE LOAD CLASSES FOR DECK LEVELS								
Ledger length [m]	Bay length L [m] - double-sided (d) - single-sided (s)							
	1.50		2.00		2.50		3.00	
	d	s	d	s	d	s	d	s
O-ledger reinforced								
1.39	6	6	5	6	5	6	4	6
1.50	6	6	5	6	4	6	4	6
O-double ledger								
1.50	6	6	5	6	5	6	4	6
2.00	5	6	5	6	4	6	3	5
2.50	4	6	4	5	3	5	3	5
3.00	3	5	3	4	2	4	2	3


COMBI, STEEL: PERMISSIBLE LOAD CLASSES FOR DECK LEVELS														
U-ledger					U-ledger reinforced					U-double ledger				
Ledger length [m]	Bay length L [m]				Ledger length [m]	Bay length L [m]				Ledger length [m]	Bay length L [m]			
	1.57	2.07	2.57	3.07		1.57	2.07	2.57	3.07		1.57	2.07	2.57	3.07
0.42	6	6	6	6	1.09	6	6	5	5	1.57	6	5	5	4
0.73	6	6	6	5	1.40	5	5	4	4	2.07	5	4	4	3
1.04	5	5	4	4	1.54	5	4	4	4	2.57	4	4	3	3
										3.07	3	3	2	1

All loads indicated here are permissible working loads. *For even, double-sided loading


LOAD CAPACITIES* IN THE COMBI LEDGER AND DIAGONAL CONNECTION IN ACC. WITH APPROVAL Z-8.22-921: MJ COMBI

BENDING MOMENT M_y 

$$M_{y,R,d} = \pm 110.0 \text{ kNcm}$$

NORMAL FORCE N 

$$N_{R,d} = \pm 33.0 \text{ kN}$$

TORSIONAL MOMENT M_t 

$$M_{t,R,d} = \pm 64.3 \text{ kNcm, only O-ledger}$$

HORIZONTAL SHEAR FORCE V_y 

$$V_{y,R,d} = \pm 17.3 \text{ kN}$$

BENDING MOMENT M_z 

$$M_{z,R,d} = \pm 45.0 \text{ kNcm}$$


NORMAL FORCE N_y DIAGONAL FOR BAY HEIGHT 2,00 M

TENSION - NORMAL FORCE

Bay length [m]	0.73	1.09	1.40	1.57	2.07	2.57	3.07	4.14
$N_{y,R,d}$ [kN]	15.9	16.6	17.5	18.1	18.5	18.5	18.5	18.5

PRESSURE - NORMAL FORCE

Bay length [m]	0.73	1.09	1.40	1.57	2.07	2.57	3.07	4.14
$N_{y,R,d}$ [kN]	-16.3	-16.8	-15.3	-14.9	-13.7	-12.2	-10.6	-6.0

VERTICAL SHEAR FORCE V_z 

Vertical shear force, single connection: O-ledger: $V_{z,R,d} = \pm 38.3 \text{ kN}$
 U-ledger: $V_{z,R,d} = \pm 32.1 \text{ kN}$

A separate certificate for the perforated disc is not required.

*The loading capacity corresponds to the component resistance R_d (contains partial safety factor γ_M) 'permissible loads' or 'working loads' are obtained by dividing the loading capacity $\gamma_F = 1.5$.

STARTING COLLAR



- With perforated disc
- Forms the scaffold base together with base jacks
- Vertical standards is placed in the starting collar for further assembly

Length (m)	Weight (kg)	Article no.	Price (€)
0,23	1,40	004833	13,10
0,43	2,50	004525	33,70



VERTICAL STANDARD WITH EXTRUDED TUBE CONNECTOR



- Steel tube Ø 48.3 x 3.2 mm, hot dip galvanized
- Drilled in the upper and lower part for tension-proof connection
- Perforated discs at a distance of 0.50 m for up to eight connections
- Posts with extruded tube connectors up to a certain height can also be used for suspended scaffolds or when moving by crane

Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	3,20	80	000696	22,10
1,00	5,20	40	000706	28,30
1,50	7,70	40	000719	40,25
2,00	9,80	40	000727	46,20
2,50	12,10	40	000764	62,90
3,00	14,40	40	000738	68,40
3,50	16,70	40	002892	81,80
4,00	18,50	40	000745	87,60



VERTICAL BASE STANDARD



- Steel, hot dip galvanized
- With additional lower perforated disc
- As an alternative for use in the lowest scaffold level without a starting collar

Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,66	4,20	40	005751	31,25
1,16	6,50	40	005752	43,40
2,16	11,00	40	004712	60,90
3,16	15,40	40	005753	85,70



VERTICAL STANDARD WITHOUT TUBE CONNECTOR



- Steel tube Ø 48.3 x 3.2 mm, hot dip galvanized
- For tensile strength in upper and lower part drilled
- Perforated discs at a distance of 0.50 m for up to 8 connections
- But drilled twice at top and bottom
- In connection with the screw-in tube connector (Article no. 005114), the optimal solution for suspended scaffolding

Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	2,80	40	000697	22,10
1,00	4,30	40	000707	28,30
1,50	6,80	40	000720	40,25
2,00	8,90	40	000728	46,30
2,50	11,20	40	000765	63,00
3,00	13,50	40	000739	68,50
4,00	17,60	40	000746	87,70



TUBE CONNECTOR FOR VERTICAL STANDARD



- Including two special screws M 12 x 65 (Article no. 010697) and two locking nuts (Article no. 005817)

Length (m)	Weight (kg)	Article no.	Price (€)
0,52	2,00	005114	11,50



HEXAGON BOLT M12 X 65



- For fixing the tube connector (Article no. 005114) to the vertical standard



Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,06	100	010697	0,90

SELF-LOCKING NUT M12



- For fixing the tube connector (Article no. 005114) to the vertical standard



Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,02	200	005817	0,50

TUBE FOLDING PLUG 12 X 60



- Galvanized

Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,085	100	012057	9,00




SUSPENDED SCAFFOLD CONNECTOR



- Steel, hot dip galvanized
- Installed in pairs
- Can be used for tension-free connection of post ends when using as suspended scaffold or when moving by crane
- Permissible load: 18 kN

Length (m)	Weight (kg)	Article no.	Price (€)
0,50	3,61	005115	36,80

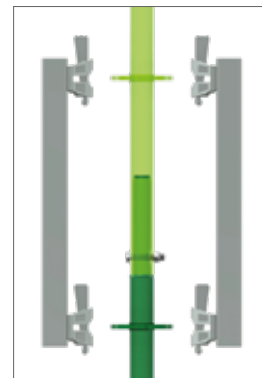

TUBE CONNECTOR



- Steel, hot dip galvanized
- With U-bracket
- For wedge head connection
- For use for lattice, tubes or ledger

Length (m)	Weight (kg)	Article no.	Price (€)
0,20	1,90	009726	24,50



TUBE CONNECTOR WITH HALF COUPLER



- Steel, hot dip galvanized
- Screw fitting for lattice beams tube or ledger

Length (m)	Weight (kg)	A/F	Article no.	Price (€)
0,30	1,80	22	000223	22,00
0,30	1,80	19	000222	22,00



TUBE CONNECTOR WITH U-BACKET



- Steel, hot dip galvanized
- For further construction e.g. for bridging while maintaining the scaffold grid

Länge (m)	Gewicht (kg)	SW	Art.-Nr.	Preis (€)
0,30	2,00	19	008290	26,00



SECURITY PIN



- For securing the scuffold joints against unintetional lift off, for example, when moving scuffold units with a crane or in special wind conditions



Diameter (cm)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,90	0,15	100	000508	1,25
1,10	0,15	100	006241	1,50

PROTECTIVE SLEEVE

- Plastic
- For covering the perforated disk



Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,06	40	009772	6,00

TUBE PROTECTION ONE-PIECE

- Protective cap for tube Ø 48.3 mm



Model	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1-reflector	0,10	60	011281	3,10

TUBE PROTECTION TWO-PIECE

- Protective cap for tube Ø 48.3 mm



Model	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2-reflector	0,15	60	011282	3,30

LEDGER



- Steel, hot dip galvanized
- With wedge head connections for attachment to the perforated discs
- For use as a support ledger for holding decks with tube support, as bracing element and as guard rail
- In deck levels bracing ledgers can be omitted if system decks and these are secured against taking off

Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,39	2,00	100	006232	26,90
0,42	2,00	100	005754	27,00
0,45	2,20	100	008250	27,00
0,73	3,50	50/100	000699	21,70
1,04	3,90	50/100	005755	25,80
1,09	4,50	50/100	000709	25,80
1,29	5,30	50/100	000714	31,70
1,40	5,80	50/100	000715	31,70
1,54	6,06	50/100	005756	32,70
1,57	6,40	50/100	000722	31,80
2,07	7,80	50/100	000730	37,10
2,57	9,70	50/100	000734	42,30
3,07	11,00	50/100	000741	47,70
4,14	14,90	100	004860	69,60



LEDGER METRIC



- Steel, hot dip galvanized
- With wedge head connections for attachment to the perforated discs
- For use as a support ledger for holding decks with tube support, as bracing element and as guard rail
- In deck levels bracing ledgers can be omitted if system decks and these are secured against taking off

Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,25	1,40	100	005620	25,50
0,41	2,00	100	005653	27,00
0,50	2,20	100	004834	27,10
0,74	3,55	50/100	004510	27,60
0,75	3,60	50/100	000748	27,60
1,00	4,00	50/100	000809	27,90
1,10	4,20	50/100	000763	28,60
1,25	4,90	50/100	005654	33,40
1,39	5,40	50/100	005655	33,50
1,50	6,10	50/100	000749	33,60
2,00	7,60	50/100	000750	37,80
2,50	9,40	50/100	000751	42,90
3,00	10,90	50/100	000752	47,40
4,00	13,30	100	004512	68,30



REINFORCED LEDGER



- Steel, hot dip galvanized
- With wedge head connections
- To support platforms for tube support with higher loads



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,09	6,90	50	000767	42,20
1,29	7,80	50	000768	46,30
1,40	8,50	50	013771	48,60

REINFORCED LEDGER METRIC



- Steel, hot dip galvanized
- With wedge head connections
- To support platforms for tube support with higher loads



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,39	9,10	50	005656	58,90
1,50	9,90	50	000790	59,10

DOUBLE LEDGER



- Steel, hot dip galvanized
- With wedge head connections
- With bracing joist to support platforms with tube support for high loads or larger spans



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,57	9,70	50	000771	65,20
2,07	12,80	50	000772	78,70
2,57	15,90	50	000773	92,40
3,07	19,00	50	000774	106,00

DOUBLE LEDGER METRIC



- Steel, hot dip galvanized
- With wedge head connections
- With bracing joist to support platforms with tube support for high loads or larger spans



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,40	9,10	50	000770	58,30
1,50	9,50	50	000759	71,90
2,00	12,60	50	000760	83,50
2,50	15,70	50	000792	99,25
3,00	18,50	50	000793	113,90

DECK LEDGER U-SUPPORT



- Steel, hot dip galvanized
- With wedge head connections
- For supporting serial UNI-CONNECT decks

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,42	2,20	200	004284	25,60
0,73	3,10	50/100	000821	24,90
1,04	4,20	50/100	005572	38,10
1,09	4,50	50/100	000822	36,50
1,40	5,60	50/100	000823	56,40



DECK LEDGER REINFORCED U-SUPPORT



- Steel, hot dip galvanized
- With wedge head connections
- For supporting serial UNI-CONNECT decks with higher loads

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,54	9,00	50/100	005757	57,20
1,57	10,20	50/100	012174	70,30
2,07	13,70	50/100	013983	84,10
2,57	17,10	50/100	013984	97,30
3,07	20,50	50/100	013985	110,00



DOUBLE LEDGER U-SUPPORT



- Steel, hot dip galvanized
- With wedge head connections
- With bracing joist to support serial UNI-CONNECT decks with high loads or larger spans

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,57	9,80	50	002716	70,30
2,07	12,80	50	002741	84,10
2,57	16,00	50	005138	97,30
3,07	19,20	50	002471	110,00




DECK LEDGER METRIC



- Steel, hot dip galvanized
- With wedge head connectors
- For use with standard UNI decks

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,41	2,10	50	005668	29,50
0,74	3,20	50	004517	33,00
1,10	5,30	50	004518	51,00

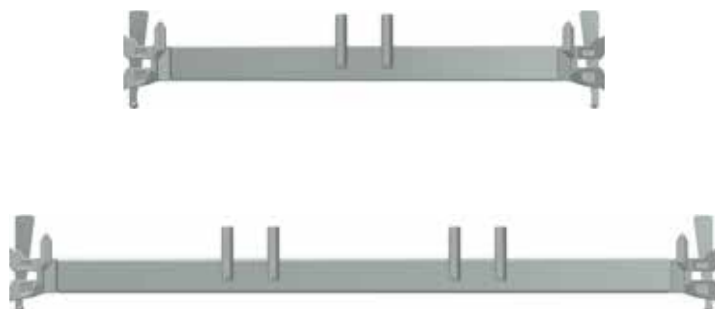

DECK LEDGER REINFORCED METRIC



- Steel, hot dip galvanized
- With wedge head connectors
- For use with standard UNI decks
- Deck ledger with width 1.50 m suitable for aluminum stairs with platform

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,39	7,20	50	005670	72,00



DOUBLE DECK LEDGER METRIC



- Steel, hot dip galvanized
- With wedge head connections
- With bracing joist to support serial UNI decks with high loads or larger spans
- Please note our instructions for assembly and use for the correct arrangement of the decks

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,50	9,40	40	004513	84,00
2,00	12,50	40	004514	109,00
2,50	15,50	40	004515	131,40
3,00	18,50	40	004516	149,50



INTERMEDIATE LEDGER METRIC



- Steel, hot dip galvanized
- For supporting system-free scaffold boards or for access decks with tube support
- Are placed on longitudinal ledgers




Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,74	3,70	50	005657	29,00
0,75	3,90	50	005658	29,40
1,00	4,60	50	005659	29,80

INTERMEDIATE DECK LEDGER DECK TO DECK



- Steel, hot dip galvanized
- As intermediate support for shorter platforms at openings or stairway
- They are placed on both sides on steel platforms
- Resistant up to load class 3

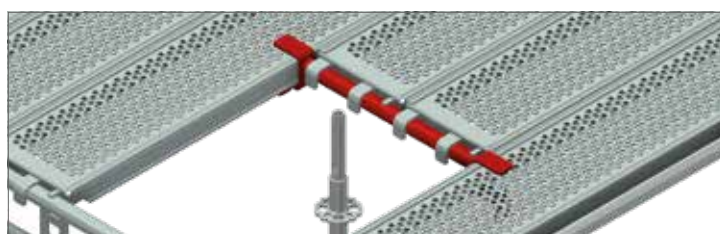


Width (m)	Weight (kg)	Article no.	Price (€)
0,32	3,30	005662	31,00
0,64	4,50	005663	38,10
0,96	5,70	005664	39,20

INTERMEDIATE DECK LEDGER EDGE



- Steel, hot dip galvanized
- As intermediate support at the end of shorter platforms
- Are placed on one side on steel platforms and on the other side on longitudinal ledgers

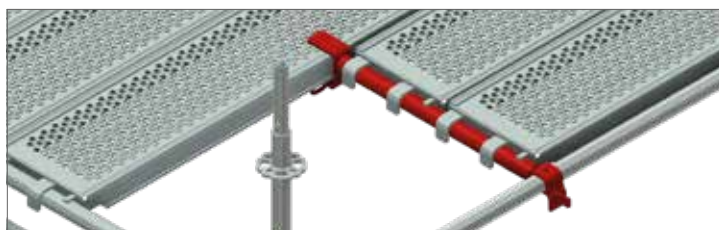


Width (m)	Weight (kg)	Article no.	Price (€)
0,32	2,70	005665	31,30
0,64	3,80	005666	39,20
0,96	4,90	005667	48,00

INTERMEDIATE LEDGER



- Steel, hot dip galvanized
- For supporting system-free scaffold boards or for access decks with tube support
- Are placed on longitudinal ledgers

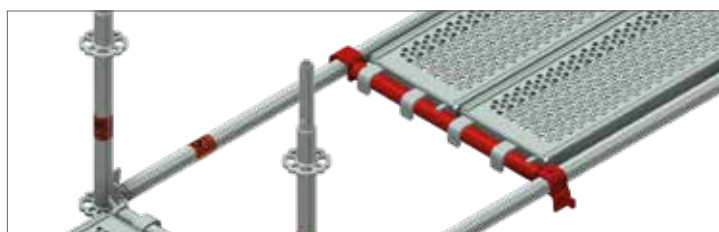

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	3,70	50	000704	23,90
1,09	5,00	50	000712	27,90
1,40	6,10	50	000717	36,20
1,57	6,70	50	000726	38,80
2,07	8,40	50	000761	47,50
2,57	10,20	50	000775	56,90
3,07	12,00	50	000776	64,80

VERTICAL DIAGONAL BRACE




- Steel tube Ø 48.3 x 2.3 mm, hot dip galvanized
- With swiveling wedge heads
- For bracing the vertical scaffold structure

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	1,57	6,40	50	004932	45,30
0,50	2,07	7,80	50	004931	47,10
0,50	2,57	9,30	50	004930	50,40
0,50	3,07	10,90	50	004929	54,20

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,00	0,73	4,20	50	006753	37,90
1,00	1,04	6,25	50	005544	41,80
1,00	1,09	6,30	50	000810	41,80
1,00	1,29	6,40	50	005761	43,60
1,00	1,40	6,90	50	000811	44,40
1,00	1,54	7,00	50	005762	45,20
1,00	1,57	7,10	50	000812	46,70
1,00	2,07	8,40	50	000813	48,90
1,00	2,57	9,80	50	000814	52,10
1,00	3,07	11,20	50	000815	55,50

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,50	0,73	5,90	50	006754	37,70
1,50	1,09	6,80	50	000816	41,80
1,50	1,40	7,20	50	000806	42,00
1,50	1,57	8,10	50	000817	48,00
1,50	2,07	9,20	50	000818	50,10
1,50	2,57	10,40	50	000819	53,10
1,50	3,07	11,80	50	000820	57,00

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	0,73	7,90	50	000702	43,20
2,00	1,04	8,20	50	006430	44,10
2,00	1,09	8,30	50	000711	44,00
2,00	1,29	8,50	50	006689	45,50
2,00	1,40	8,70	50	000716	43,80
2,00	1,57	8,80	50	000725	45,30
2,00	2,07	9,60	50	000733	47,10
2,00	2,57	10,40	50	000737	50,40
2,00	3,07	11,20	50	000744	54,20

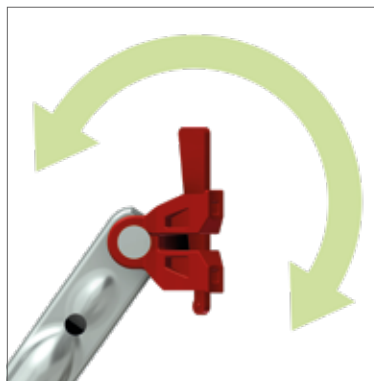

VERTICAL DIAGONAL BRACE METRIC




- Steel tube Ø 48.3 x 2.3 mm, hot dip galvanized
- With swiveling wedge heads
- For bracing the vertical scaffold structure

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	1,00	4,50	50	004949	41,70
0,50	1,50	5,70	50	004948	43,90
0,50	2,00	7,00	50	002184	49,50
0,50	2,50	8,20	50	005108	52,40
0,50	3,00	9,50	50	004947	56,20

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,00	0,50	4,70	50	004946	45,10
1,00	0,74	5,00	50	004945	42,90
1,00	0,75	5,10	50	004944	42,90
1,00	1,00	5,40	50	004943	43,30
1,00	1,10	5,50	50	004942	43,30
1,00	1,25	5,80	50	004941	43,80
1,00	1,50	6,30	50	000803	47,30
1,00	2,00	7,40	50	000802	50,50
1,00	2,50	8,60	50	000801	51,85
1,00	3,00	9,80	50	000804	56,20

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,50	0,50	6,00	50	005684	47,00
1,50	0,74	6,20	50	004939	43,00
1,50	1,00	6,40	50	004938	45,50
1,50	1,10	6,50	50	004937	45,70
1,50	1,50	7,20	50	000808	48,90
1,50	2,00	8,20	50	000797	50,60
1,50	2,50	9,20	50	000807	50,85
1,50	3,00	10,30	50	000805	55,00


Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	0,50	7,00	50	004791	42,00
2,00	0,74	7,40	50	004935	42,05
2,00	1,00	7,60	50	004717	42,15
2,00	1,10	7,70	50	004934	43,85
2,00	1,39	8,10	50	004933	44,90
2,00	1,50	8,30	50	000753	45,10
2,00	2,00	9,10	50	000755	48,15
2,00	2,50	10,00	50	000754	52,10
2,00	3,00	11,00	50	000756	52,75

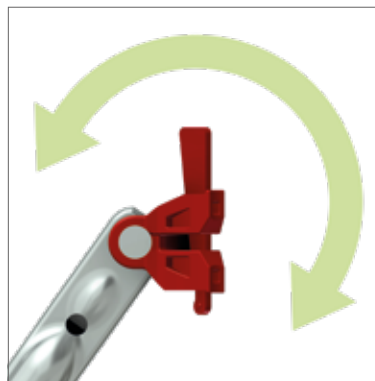

SPACE DIAGONAL BRACE



- Steel tube, hot dip galvanized
- Variable usage at each height of the bay
- For bracing and reinforcing the horizontal levels

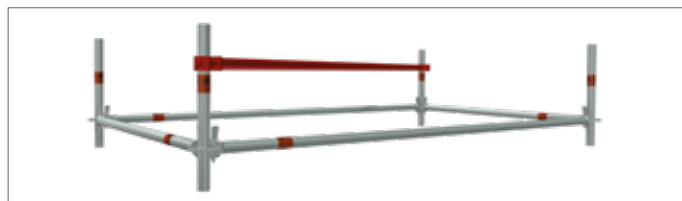

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	1,57	6,80	50	007736	42,60
0,73	2,07	8,20	50	007737	48,40
0,73	2,57	9,60	50	007738	53,90
0,73	3,07	11,10	50	007739	67,10

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,09	1,09	6,20	50	007687	39,60
1,09	1,57	7,30	50	007740	44,70
1,09	2,07	8,60	50	007741	50,20
1,09	2,57	10,00	50	007742	58,40
1,09	3,07	11,40	50	007743	70,00


Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,57	1,57	8,10	50	007744	52,00
1,57	2,07	9,40	50	007748	58,60
1,57	2,57	10,70	50	007746	66,40
1,57	3,07	12,00	50	007747	75,00

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,07	2,07	10,40	50	007749	70,00
2,07	2,57	11,50	50	007750	74,00
2,07	3,07	12,80	50	007756	80,80

HORIZONTAL DIAGONAL BRACE METRIC



- Steel, hot dip galvanized
- Is used in birdcage scaffolds for bracing horizontal levels in square fields
- On both sides with pin hanging system
- To be secured against lifting off on site

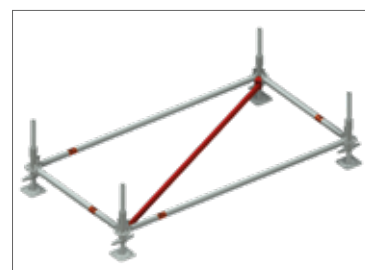

Field length (m)	Field width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	0,74	5,60	50	005810	53,80
2,00	1,00	5,80	50	005685	55,60
2,00	1,50	6,50	50	005686	56,70

Field length (m)	Field width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,50	0,74	6,80	50	005687	54,20
2,50	1,00	7,00	50	005688	55,20
2,50	1,10	7,10	50	005689	59,60
2,50	1,39	7,30	50	005690	61,00
2,50	1,50	7,50	50	005691	60,40
2,50	2,00	8,20	50	004526	63,10


Field length (m)	Field width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
3,00	0,74	7,90	50	005692	61,00
3,00	1,00	8,10	50	005693	62,50
3,00	1,10	8,20	50	005694	63,00
3,00	1,39	8,40	50	005695	63,70
3,00	1,50	8,50	50	005696	64,80
3,00	2,00	9,10	50	005697	66,20
3,00	2,50	9,90	50	000679	67,80
3,00	3,00	10,70	50	009336	69,60

HORIZONTAL DIAGONAL BRACE



- Steel, hot dip galvanized
- Is used in birdcage scaffolds for bracing horizontal levels in square fields
- On both sides with pin hanging system
- To be secured against lifting off on site

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,09	2,07	6,00	50	002878	45,20
0,73	2,57	7,00	50	005763	49,10
1,09	2,57	7,20	50	006393	53,70
1,57	2,57	7,60	50	010235	63,20
2,07	2,57	8,50	50	006374	69,30
1,09	3,07	8,40	50	006394	65,00

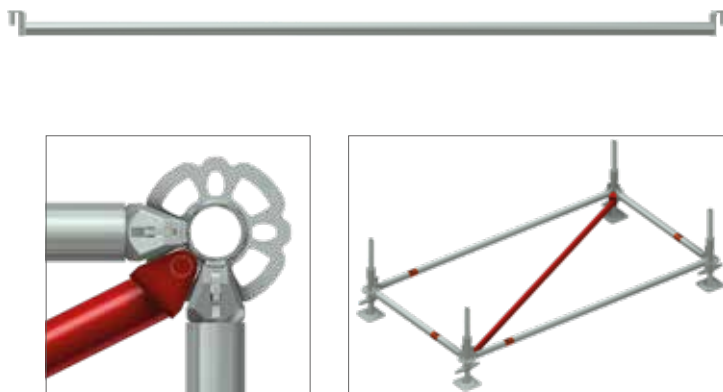


DIAGONAL LEDGER



- Steel, hot dip galvanized
- Is used in birdcage scaffolds for bracing horizontal levels in square fields
- On both sides with wedge head connections

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,57	1,57	7,70	50	005764	50,10
2,07	2,07	10,00	50	005765	61,70
2,57	2,57	12,20	50	005766	73,30
3,07	3,07	14,50	50	005767	86,80

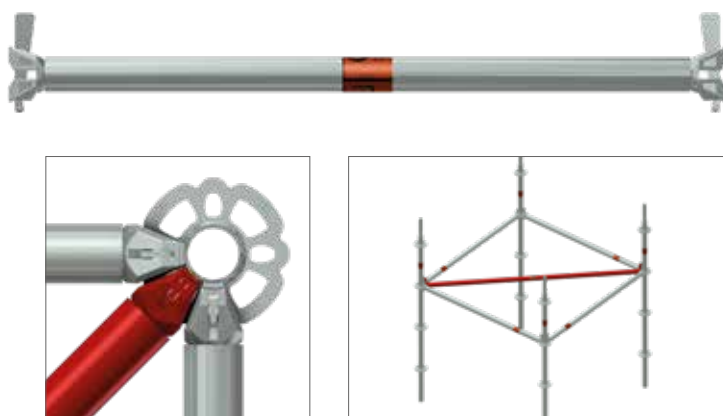


DIAGONAL LEDGER METRIC



- Steel, hot dip galvanized
- Is used in birdcage scaffolds for bracing horizontal levels in square fields
- On both sides with wedge head connections

Field width (m)	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,75	0,75	4,00	50	005698	38,80
1,00	1,00	5,20	50	005699	46,80
1,50	1,50	7,40	50	005700	52,80
2,00	2,00	9,70	50	005701	65,10
2,50	2,50	11,90	50	004602	78,60
3,00	3,00	14,20	50	004601	92,00

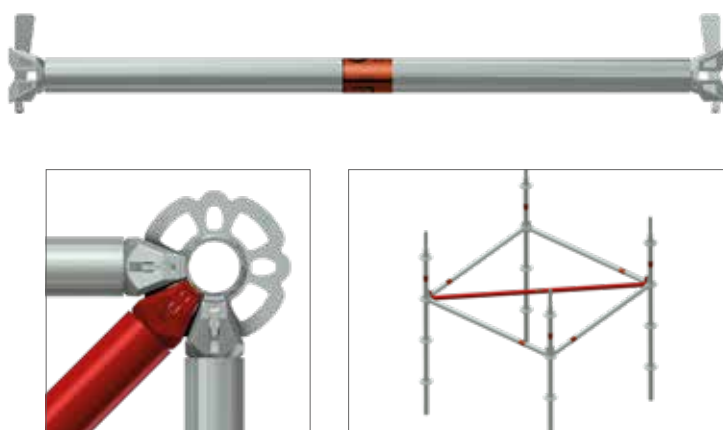

STEEL DECK TUBE SUPPORT 0.19 M



- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling
- Good stackability
- With integrated deck retainer
- Levelling deck for closing gaps in staging scaffolding and brackets



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,19	5,00	6	100/120	008750	53,90
1,09	0,19	6,70	6	100/120	008751	57,80
1,40	0,19	8,10	6	100/120	008753	58,80
1,57	0,19	9,00	6	100/120	008754	59,30
2,07	0,19	11,30	6	100/120	008755	66,20
2,57	0,19	13,70	5	100/120	008756	76,30
3,07	0,19	16,10	4	100/120	008757	87,00



STEEL DECK TUBE SUPPORT 0.32 M



- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling
- Good stackability
- With integrated deck retainer



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,32	7,40	6	60/80	008740	56,50
1,09	0,32	9,90	6	60/80	008741	57,20
1,40	0,32	12,10	6	60/80	008743	67,30
1,57	0,32	13,70	6	60/80	008744	65,40
2,07	0,32	17,30	6	60/80	008745	74,80
2,57	0,32	20,80	5	60/80	008746	85,20
3,07	0,32	24,40	4	60/80	008747	96,60



STEEL DECK TUBE SUPPORT METRIC 0.32 M



- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling
- Good stackability
- With integrated deck retainer



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,75	0,32	7,20	6	60/80	005702	66,60
1,00	0,32	8,70	6	60/80	005703	68,50
1,10	0,32	9,10	6	60/80	004715	69,00
1,50	0,32	12,20	6	60/80	000796	75,90
2,00	0,32	15,30	6	60/80	000798	87,50
2,50	0,32	18,40	5	60/80	000799	96,90
3,00	0,32	21,40	4	60/80	000800	109,00



STEEL DECK 0.19 M - UC



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Non-slip surface through pronounced hole profiling
- Reducing the wall thickness and optimized hole profiling leads to weight savings
- Good stackability due to the guide grooves at the edges



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,19	4,20	6	100/120	008780	40,80
1,09	0,19	6,40	6	100/120	008781	48,50
1,57	0,19	8,50	6	100/120	008782	49,90
2,07	0,19	10,60	6	100/120	008783	58,10
2,57	0,19	12,70	5	100/120	008784	67,95
3,07	0,19	15,90	4	100/120	008785	78,85

STEEL DECK OPTI-LINE 0.32 M - UC



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Non-slip surface through pronounced hole profiling
- Reducing the wall thickness and optimized hole profiling leads to weight savings
- Good stackability due to the guide grooves at the edges
- Complies with the requirements of DIN EN 12811
- Can be used in guard and roofguard scaffolds as per DIN 4420
- Point welded



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,32	5,60	6	60/80	008770	55,80
1,09	0,32	7,70	6	60/80	008771	56,80
1,40	0,32	9,30	6	60/80	011731	57,80
1,57	0,32	10,90	6	60/80	008772	58,40
2,07	0,32	13,90	6	60/80	008773	65,55
2,57	0,32	16,90	5	60/80	008774	75,65
3,07	0,32	19,80	4	60/80	008775	85,90

STEEL DECK 0.32 M - UC



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Non-slip surface through pronounced hole profiling
- Good stackability due to the guide grooves at the edges
- Complies with the requirements of DIN EN 12811
- Can be used in guard and roofguard scaffolds as per DIN 4420




Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,57	0,32	19,70	5	60/80	008764	81,55
3,07	0,32	23,30	4	60/80	008765	92,40
4,14	0,32	31,00	3	60/80	008766	168,00

STEEL DECK 0.15 M



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Bracket deck for scaffold widening with ½ deck width, e.g. for WDVS work
- Compensating deck to close gaps in platform scaffolding
- Good stackability
- Also fits in the main scaffold instead of the standard decks

WDVS = Thermal insulation composite system



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,65	0,15	3,90	3	102	013270	50,90
0,74	0,15	4,00	3	102	013271	51,40
1,00	0,15	4,90	3	102	013272	54,10
1,10	0,15	5,00	3	102	013273	54,50
1,25	0,15	5,80	3	102	013274	58,30
1,50	0,15	6,70	3	102	013275	61,40
2,00	0,15	8,50	3	102	013276	68,20
2,50	0,15	10,30	3	102	013277	75,25
3,00	0,15	12,10	3	102	013278	79,90

STEEL DECK OPTI-LINE 0.32 M - UNI



ID

- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling
- Up to 3.4 kg lighter with the same load class
- Good to stackability
- With handles for length 2.50 m



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,74	0,32	5,30	6	60/80	008840	58,50
1,10	0,32	7,30	6	60/80	008841	60,10
1,50	0,32	10,80	6	60/80	008843	68,20
2,00	0,32	13,20	6	60/80	008844	76,30
2,50	0,32	15,90	5	60/80	008845	83,40
3,00	0,32	19,25	4	60/80	008846	95,60

STEEL DECK 0.32 M - UNI



ID

- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling
- Good to stackability
- With handles for length 2.50 m



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,00	0,32	15,50	6	60/80	008834	78,90
2,50	0,32	18,80	5	60/80	008835	85,20
3,00	0,32	23,00	4	60/80	008836	97,10

ALUMINUM DECK WITH STEEL CAPS 0.32 M



- Non-slip surface and easy to stack
- Optimized ratio of weight and carrying through computerassisted profile optimization
- Steel caps with optimized hanging claws, therefore robust and durable
- Patented beam reinforcements in the walking area ensure minimal deflection and best possible slip resistance




Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,32	3,80	6	18	012323	98,50
1,09	0,32	5,10	6	18	012324	103,50
1,40	0,32	6,30	6	18	012325	106,00
1,57	0,32	6,90	6	18	012326	108,50
2,07	0,32	8,80	6	18	012327	128,60
2,57	0,32	10,70	5	18	012328	147,50
3,07	0,32	12,50	4	18	012329	170,90

ALUMINUM DECK WITH STEEL CAPS 0.62 M



- Non-slip surface and easy to stack
- Optimized ratio of weight and carrying through computerassisted profile optimization
- Steel caps with optimized hanging claws, therefore robust and durable
- Patented beam reinforcements in the walking area ensure minimal deflection and best possible slip resistance

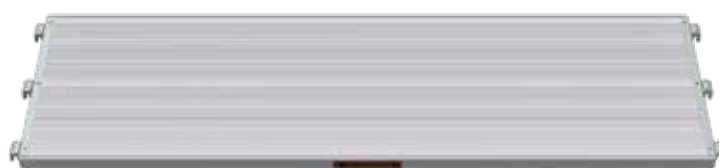

Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,61	6,80	6	18	006625	112,70
1,09	0,61	8,80	6	18	006627	131,15
1,40	0,61	11,90	6	18	006629	139,00
1,57	0,61	13,40	6	18	006631	149,50
2,07	0,61	14,50	6	18	006632	180,50
2,57	0,61	17,10	5	18	006633	213,90
3,07	0,61	20,30	4	18	006634	242,60

TIMBER DECK METRIC - UNI



- Timber, 48 mm thick
- With hot dip galvanized deck caps
- Can be used on both sides
- Mechanically checked in accordance with DIN EN 14801 and DIN 4074 MS 10/13
- Waterproofed and weatherproof glued
- Can be used in guard and roof guard scaffolds as per DIN 4420 up to $L \leq 3.00$ m



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,74	0,32	6,00	6	60/80	000176	40,00
1,10	0,32	8,50	6	60/80	000175	47,20
1,50	0,32	11,50	6	60/80	000035	53,90
2,00	0,32	14,50	5	60/80	000034	61,50
2,50	0,32	18,20	4	60/80	000032	69,60
3,00	0,32	22,00	3	60/80	000030	78,50

COMBI DECK WITH PLYWOOD PANEL - UC



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- Robust riveted head profiles and steel connection claws, hot dip galvanized



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
0,73	0,61	6,30	4	14	000479	96,30
1,09	0,61	8,40	4	14	003195	108,00
1,57	0,61	13,20	4	14	000481	128,45
2,07	0,61	17,00	4	14	000482	143,30
2,57	0,61	20,00	3	14	000483	163,60
3,07	0,61	23,00	3	14	000484	193,10

COMBI DECK TUBE SUPPORT WITH PLYWOOD PANEL



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- Robust riveted head profiles and steel connection claws, hot dip galvanized




Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
1,57	0,61	13,20	3	14	006038	160,00
2,07	0,61	17,00	3	14	005933	179,10
2,57	0,61	20,00	3	14	006037	204,20
3,07	0,61	23,00	3	14	005932	233,00

STEEL PLANK 0.30 M



- Steel, hot dip galvanized
- Non-slip surface through pronounced hole profiling




Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)	
1,00	0,30	6,75	80	013310	44,60	🕒
1,50	0,30	9,75	80	013311	52,50	🕒
2,00	0,30	12,80	80	013312	60,40	🕒
2,50	0,30	15,85	80	013313	68,60	🕒

CORNER DECK



- Steel, hot dip galvanized
- As a supplement for system decks in the inner corner area
- Non-slip surface



008159



013862

Model	Length (m)	Width (m)	Weight (kg)	Article no.	Price (€)
1-bohlig	0,32	0,32	4,45	013862	57,40
2-bohlig	0,73	0,73	17,00	008159	168,60

COMBI ACCESS DECK TUBE SUPPORT WITH PLYWOOD DECK



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- With integrated aluminum ladder
- Robust riveted head profiles and steel connection claws, hot dip galvanized
- Access flap open to the back



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,57	0,61	25,50	3	14	005848	338,20
3,07	0,61	29,80	3	14	005849	360,00

COMBI ACCESS DECK TUBE SUPPORT WITH ALUMINUM DECK METRIC



- With non-slip aluminum deck
- Weather resistant, light and robust
- With integrated ladder aluminum
- Robust riveted head profiles and steel connection claws, hot dip galvanized
- Access flap open to the side



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,50	0,63	25,20	4	14	002468	440,00
3,00	0,63	28,80	3	14	005727	465,50

COMBI ACCESS DECK TUBE SUPPORT WITH ALUMINUM DECK



- With non-slip aluminum deck
- Weather resistant, light and robust
- With integrated ladder aluminum
- Robust riveted head profiles and steel connection claws, hot dip galvanized
- Access flap open to the back




Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,57	0,61	26,60	4	14	005546	381,10
3,07	0,61	30,50	3	14	004679	419,00

COMBI ACCESS DECK WITH PLYWOOD DECK - UC



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- With integrated aluminum ladder
- Robust riveted head profiles and steel connection claws, hot dip galvanized

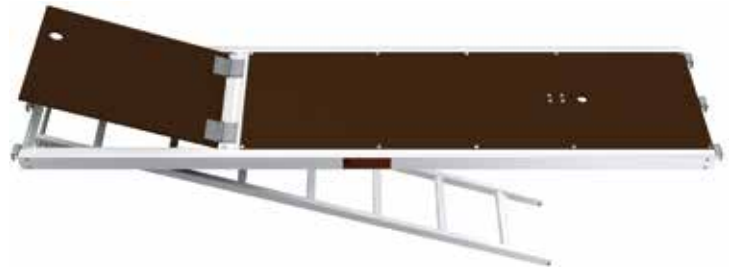

Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,57	0,61	24,00	3	14	000492	307,00
3,07	0,61	29,00	3	14	000494	350,40

COMBI ACCESS DECK



- With non-slip deck aluminum
- With integrated aluminum ladder (Length 2.07 m extendable)
- Access flap made of corrugated sheet metal with safety lock
- Easy release of the integrated access ladder, also from the soil surface possible
- Head profiles and optimized connection claws from steel, hot dip galvanized



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,07	0,61	23,30	4	14	009872	355,40
2,57	0,61	23,70	4	14	000486	362,00
3,07	0,61	26,70	3	14	000488	404,60

COMBI ACCESS DECK WITHOUT LADDER



- With non-slip deck aluminum
- Without integrated ladder
- Access flap made of corrugated sheet metal with safety lock
- Head profiles and optimized connection claws from steel, hot dip galvanized




Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,57	0,61	11,00	14	009079	240,00
2,07	0,61	17,50	14	000490	253,00
2,57	0,61	20,00	14	002250	296,30
3,07	0,61	25,00	14	000489	337,00

COMBI ACCESS DECK WITH PLYWOOD PANEL - UNI



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- With integrated aluminum ladder
- Access flap open to the side

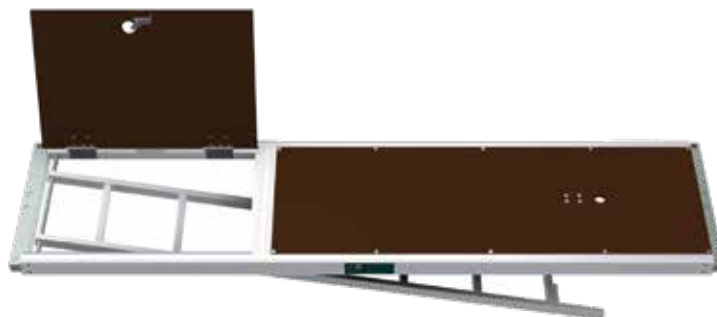

Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,50	0,63	25,00	3	14	000388	330,00
3,00	0,63	28,00	3	14	000387	375,50

ACCESS DECK WITH ALUMINUM DECK - UNI



- With non-slip deck aluminum
- Weather resistant, light and robust
- With integrated aluminum ladder (at length 2.00 m extendable)
- Access flap made of corrugated sheet metal, open to the side



Length (m)	Width (m)	Weight (kg)	Load class	PU (pcs.)	Article no.	Price (€)
2,00	0,63	19,00	4	14	000391	355,00
2,50	0,63	22,50	4	14	000389	365,10
3,00	0,63	25,00	3	14	000390	399,60

ACCESS LADDER ALUMINUM



- Aluminum
- As a separate ladder for the inside scaffold ascent
- With riveted claws for safe mounting to the access decks



Length (m)	Width (m)	Weight (kg)	Article no.	Price (€)
2,16	0,40	3,00	001323	69,10

ACCESS LADDER STEEL




- Steel, hot dip galvanized
- As a separate ladder for the inside scaffold ascent
- With riveted claws for safe mounting to the access decks



Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,16	0,40	10,50	80	000172	64,70

VERTICAL LADDER ALUMINUM


- Suited for all scaffold types, may also be used for ladder scaffolds
- TÜV inspected
- With riveted tube connectors
- Distance between rungs 28 cm
- Is fastened with standard couplers
- Plastic base included

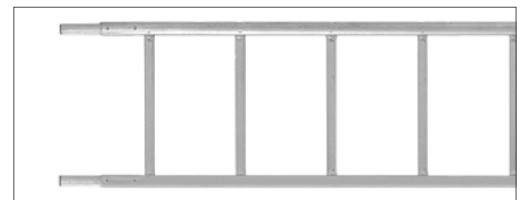

Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	0,47	5,80	20	000409	144,40
3,00	0,47	8,00	20	000410	157,20
4,00	0,47	10,00	20	000411	203,40
5,00	0,47	12,60	20	000412	247,90
6,00	0,47	14,50	20	000413	283,10

VERTICAL LADDER STEEL

- The posts are steel tube Ø 48.3 x 3.2 mm, hot dip galvanized
- Standard coupler connection is ensured
- This robust ladder has become the first choice in industry for heavy-duty applications
- The ladder can be extended using normal tube connectors

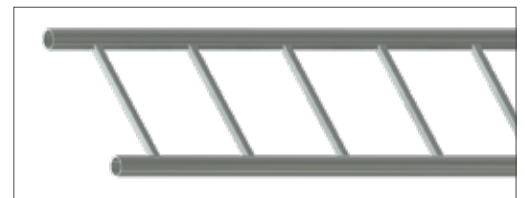

Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	0,45	21,00	20	000227	114,50
3,00	0,45	28,50	20	000228	147,90
4,00	0,45	34,50	20	000229	216,20
5,00	0,45	44,50	20	000230	262,40

ALUMINUM STAIRS WITH PLATFORM AND TUBE SUPPORT



- Bay height 2.00 m
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway
- Evenly distributed area load $p = 2.5 \text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2 \text{ m}^2 F = 1.5 \text{ kN}$
- Meets the requirements according to DIN EN 12811-1

Field length (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,57	3,25	0,64	30,00	10	005069	490,50
3,07	3,65	0,64	35,00	10	005780	567,00



ALUMINUM STAIRS WITH PLATFORM AND TUBE SUPPORT METRIC



- Bay height 2.00 m
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway
- Evenly distributed area load $p = 2.5 \text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2 \text{ m}^2 F = 1.5 \text{ kN}$
- Meets the requirements according to DIN EN 12811-1

Field length (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,50	3,25	0,64	28,50	10	005746	485,00
3,00	3,65	0,64	33,50	10	005747	560,00



ALUMINUM STAIRS WITH PLATFORM - UC



- Bay height 2.00 m
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway
- Evenly distributed area load $p = 2.5 \text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2 \text{ m}^2 F = 1.5 \text{ kN}$
- Meets the requirements according to DIN EN 12811-1

Field length (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,57	3,25	0,64	23,00	10	000419	448,00
3,07	3,65	0,64	28,00	10	000420	540,00



ALUMINUM STAIRS WITH PLATFORM METRIC - UNI



- Bay height 2.00 m
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway
- Evenly distributed area load $p = 2.5 \text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2 \text{ m}^2 F = 1.5 \text{ kN}$
- Meets the requirements according to DIN EN 12811-1

Field length (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,50	2,00	0,64	22,50	10	000417	470,00
3,00	3,60	0,64	33,00	10	000418	519,00



ALUMINUM BEGINNING STAIRS WITH PLATFORM - UC



- Beginning stair with integrated base jack mounts
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway

Height (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,00	1,49	0,64	11,60	10	006521	290,00
1,50	1,75	0,64	18,60	15	009945	415,00



ALUMINUM BEGINNING STAIRS WITH PLATFORM METRIC - UNI



- Beginning stair with integrated base jack receptacles
- For fast and safe access to the scaffold levels

Height (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,00	1,50	0,64	10,70	10	000395	285,10
1,50	1,75	0,64	19,00	15	009944	393,00



ALUMINUM BEGINNING STAIRS WITH PLATFORM AND TUBE SUPPORT



- Beginning stair with integrated base jack receptacles
- For fast and safe access to the scaffold levels

Height (m)	Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	1,50	0,64	5,30	10	010814	226,00
1,00	1,50	0,64	13,00	10	010747	279,00



SINGLE OUTSIDE STAIRCASE HANDRAIL



- Steel, hot dip galvanized
- To connect to the COMBI perforated disk

Field height (m)	Length (m)	Weight (kg)	Article no.	Price (€)
2,00	2,57	11,10	005071	78,60
2,00	3,07	12,60	000424	91,50



SINGLE OUTSIDE STAIRCASE HANDRAIL METRIC



- Steel, hot dip galvanized
- To connect to the COMBI perforated disk

Field height (m)	Length (m)	Weight (kg)	Article no.	Price (€)
2,00	2,50	10,90	005748	79,50
2,00	3,00	12,40	005749	92,70



OUTSIDE STAIRCASE HANDRAIL



- Steel, hot dip galvanized
- For aluminum platform stairs
- For connection for round ledger or guard rail brackets

Field height (m)	Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2,00	2,57	16,00	40	004603	129,00
2,00	3,07	17,80	40	004209	143,20



INSIDE STAIRCASE HANDRAIL



- Steel, hot dip galvanized
- For aluminum platform stairs
- Can be used for field wide 2.50 and 3.00 m
- For mounting to the stair string
- Integrated end plug on the handrail for protection




Length (m)	Weight (kg)	A/F	PU (pcs.)	Article no.	Price (€)
2,25	11,50	19	20	000425	124,00
2,25	11,50	22	20	006942	124,00

ROUND INSIDE GUARD RAIL



- Steel, hot-dip galvanized
- For aluminum platform stairs
- For mounting to the stair string



Weight (kg)	A/F	PU (pcs.)	Article no.	Price (€)
5,80	19	40	009226	66,00

HANDRAIL BRACKET



- Steel, hot dip galvanized
- Tube support Ø 48.3 mm
- To set up a stairway in front of a scaffold field



Length (m)	Weight (kg)	Article no.	Price (€)
0,10	0,70	005781	16,00

STAIR TOWER



U-STAIR STRINGER



- Steel, hot-dip galvanized
- Integrated covering for UC steel decks 0.32 m
- 2-stage version with half coupler at the top and wedge head at the bottom
- 8-stage version with two wedge heads
- Gradient 16.60 cm



Model	Field length (m)	Field height (m)	Weight (kg)	PU (pcs.)	Article no.	169,90
2-stage	0,73	0,50	8,90	28	011019	295,00
5-stage	1,57	1,00	19,60	28	011167	410,60
8-stage	2,57	1,50	35,00	28	010950	360,30

STEEL DECK FOR STAIR PIECE



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Non-slip surface through pronounced hole profiling
- Additional perforation in the edge area to increase slip resistance
- Good stackability due to the guide grooves at the edges
- Complies with the requirements of DIN EN 12811



Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,32	6,30	60/80	011190	68,60
1,09	0,32	8,80	60/80	011191	69,70
1,57	0,32	12,70	60/80	011192	78,30
2,07	0,32	16,20	60/80	011193	88,10

RODS STAIR RAILING FOR U-STAIR STRINGER



- Steel, hot-dip galvanized
- For installation in the MJ stair tower
- With hook/bolt heads for attachment to the module plate



Model	Field length (m)	Field height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
2-stage	0,73	0,50	14,00	20	011102	191,20
5-stage	1,57	1,00	25,00	20	011289	327,40
8-stage	2,57	1,50	38,00	20	011009	390,80

RODS STAIR RAILING



- Steel, hot-dip galvanized
- For installation in the MJ stair tower
- With hook/bolt heads for attachment to the module plate



Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	1,10	14,00	20	010991	144,00
1,09	1,10	18,00	20	010992	193,50
1,29	1,10	19,60	20	010993	204,00
1,40	1,10	20,60	20	010994	210,60
1,57	1,10	23,90	20	010995	231,80
2,07	1,10	28,40	20	010996	264,70
2,57	1,10	33,10	20	010997	303,00

GAP LEDGER FOR STAIR TOWER



- Steel, hot-dip galvanized
- Compensation element for installation in stair towers
- Use when using the stair stringer at the upper and lower transition to the platform
- With two wedge heads



Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,11	5,40	50	010981	76,30
1,09	0,11	7,80	50	010982	85,70
1,29	0,11	8,60	50	010983	92,60
1,40	0,11	9,80	50	010984	96,50
1,57	0,11	10,70	50	010985	99,05
2,07	0,11	14,40	50	010986	121,80
2,57	0,11	17,80	50	010987	147,30

U-GAP COVER WITH CLAWS



- Steel, hot-dip galvanized
- Compensation element to cover gaps between the platform elements
- With four claws
- For a gap-free transition between the platform elements




Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,11	4,00	50	011020	47,90
1,09	0,11	4,40	50	011021	48,80
1,40	0,11	5,50	50	011022	50,10
1,57	0,11	6,00	50	011023	50,60
2,07	0,11	9,10	50	011024	68,50
2,57	0,11	12,00	50	011025	71,50

DECK FASTENING U-SUPPORT



- Steel, hot dip galvanized
- To prevent lifting of UNI-CONNECT decks


Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,42	0,70	-	005758	13,20
0,73	1,30	200	002222	19,40
1,04	1,70	100	005573	21,90
1,09	1,90	100	005580	21,30
1,40	2,50	100	003703	41,00
1,54	2,70	100	005759	42,50
1,57	2,75	100	004307	43,20
2,07	5,20	100	004340	49,80
2,57	6,50	100	005760	56,60
3,07	7,70	100	004599	63,20

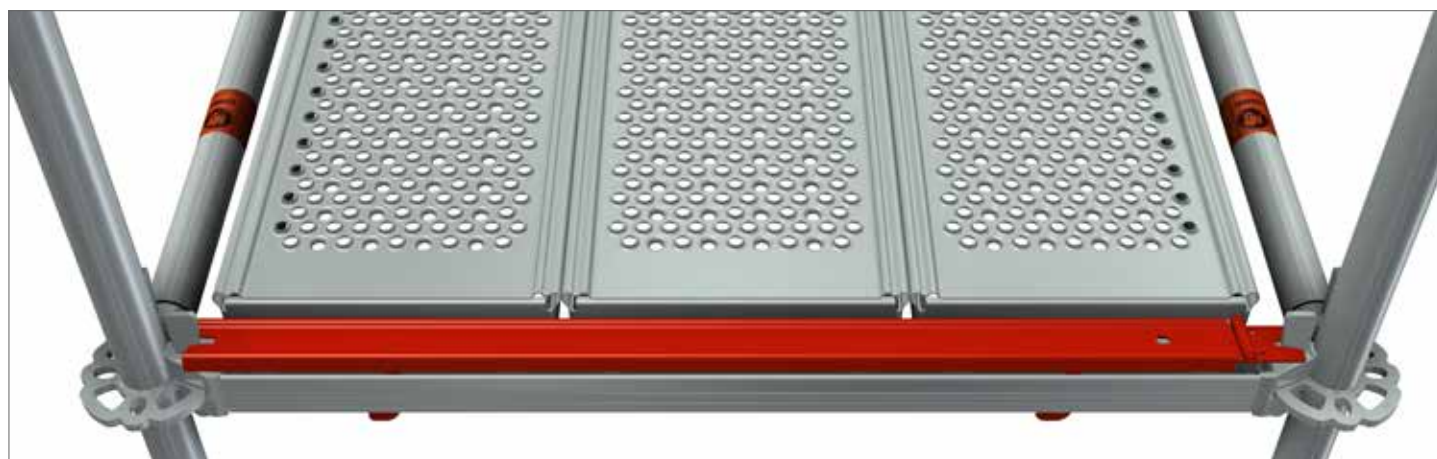

DECK FASTENING WITH WEDGE



- Steel, hot dip galvanized
- For preventing decks from lifting off
- With wedge head connection



Weight (kg)	Article no.	Price (€)
0,70	006850	12,50

DECKING FASTENER UNI-SUPPORT METRIC



- Stell, hot dip galvanized
- To secure against lift off decks and for mounting toe boards
- With toe board bracket

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,74	2,70	150	005677	29,20
1,10	3,30	100	005678	35,20
1,39	3,90	50	005679	35,80
1,50	4,10	50	005680	37,70
2,00	5,00	50	005681	48,70
2,50	5,90	50	005682	57,40
3,00	6,80	50	005683	62,80



TOE BOARD TUBE-SUPPORT



- Timber
- Galvanized steel fittings
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,15	1,50	80	000701	17,10
1,09	0,15	2,50	80	000710	17,70
1,40	0,15	3,10	80	000718	18,30
1,57	0,15	3,50	80	000724	18,40
2,07	0,15	4,30	80	000732	20,20
2,57	0,15	5,70	80	000736	21,60
3,07	0,15	6,30	80	000743	22,90
4,14	0,15	7,90	80	005055	51,30



TOE BOARD TUBE-SUPPORT METRIC



- Timber
- Galvanized steel fittings
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,74	0,15	1,90	80	006589	18,50
0,75	0,15	1,90	80	005728	19,10
1,00	0,15	2,30	80	005729	20,50
1,10	0,15	2,40	80	005730	20,50
1,50	0,15	3,20	80	000786	22,60
2,00	0,15	4,20	80	005731	24,30
2,50	0,15	5,10	80	000788	26,10
3,00	0,15	6,00	80	000789	38,40



ALUMINUM TOE BOARD TUBE-SUPPORT



- Aluminum
- Galvanized steel fittings
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,15	1,30	80	005772	25,00
1,09	0,15	1,90	80	005773	29,90
1,40	0,15	2,40	80	006120	33,00
1,57	0,15	2,70	80	005774	34,70
2,07	0,15	3,40	80	005775	43,20
2,57	0,15	4,20	80	005776	51,80
3,07	0,15	4,90	80	005777	60,50



STEEL TOE BOARD O-SUPPORT

ID

- Steel, hot dip galvanized
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)	
0,73	0,15	1,70	–	006928	18,60	🕒
1,09	0,15	2,40	–	006929	20,60	🕒
1,57	0,15	3,30	–	006930	28,60	🕒
2,07	0,15	4,30	–	006931	33,80	🕒
2,57	0,15	5,30	–	006932	39,90	🕒
3,07	0,15	6,20	–	006933	45,80	🕒

STEEL TOE BOARD U-SUPPORT

ID

- Steel, hot dip galvanized
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)	
0,73	0,15	1,80	–	011312	18,60	🕒
1,09	0,15	2,50	–	011313	22,60	🕒
1,40	0,15	3,10	–	011314	26,00	🕒
1,57	0,15	3,40	–	011315	28,60	🕒
2,07	0,15	4,40	–	011316	33,50	🕒
2,57	0,15	5,40	–	011317	39,90	🕒
3,07	0,15	6,50	–	011318	45,80	🕒

TOE BOARD U-SUPPORT



ID

- Timber
- Galvanized steel fittings
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,15	1,50	80	005056	17,10
1,09	0,15	2,30	80	005057	17,70
1,40	0,15	3,00	80	005058	18,30
1,57	0,15	3,20	80	005059	18,80
2,07	0,15	4,30	80	005060	20,10
2,57	0,15	5,70	80	005061	21,60
3,07	0,15	5,90	80	005062	22,80
4,14	0,15	7,90	80	005063	41,10



ALUMINUM TOE BOARD U-SUPPORT



ID

- Aluminum
- Galvanized steel fittings
- To complete the three-part side protection

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	0,15	1,40	80	005831	25,00
1,09	0,15	2,00	80	005832	30,10
1,40	0,15	2,50	80	006121	33,00
1,57	0,15	2,80	80	005833	34,90
2,07	0,15	3,50	80	005834	43,50
2,57	0,15	4,30	80	005835	52,10
3,07	0,15	5,00	80	005836	60,50



TOE BOARD METRIC - UNI



- Timber
- Galvanized steel fittings
- To complete the three-part side protection in conjunction with UNI decks
- Easy mounting on the toe board bolts of the deck fastener

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,74	0,15	2,00	80	000186	16,80
1,10	0,15	2,50	80	000184	17,10
1,50	0,15	3,00	80	000071	17,60
2,00	0,15	4,50	80	000070	18,70
2,50	0,15	5,50	80	000069	20,50
3,00	0,15	6,50	80	000066	21,80
4,00	0,15	10,00	80	000183	58,20



END TOE BOARD METRIC - UNI



- Timber
- Galvanized steel fittings
- To complete the three-part side protection in the frontside in conjunction with UNI decks

Length (m)	Height (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,74	0,15	1,50	100	005852	18,30
1,10	0,15	1,90	100	005853	20,40
1,50	0,15	2,50	80	005854	21,80
2,00	0,15	4,50	80	005855	24,65
2,50	0,15	5,50	80	005856	26,20
3,00	0,15	6,50	80	005857	27,00



INDIVIDUAL COLOR AND PRINT ON REQUEST

TOE BOARD BRACKET



- Steel, hot dip galvanized
- With wedge head connection
- May only be used in conjunction with UNI toe board



Weight (kg)	Article no.	Price (€)
0,60	005732	14,80

BRACKET TUBE-SUPPORT



- Steel, hot dip galvanized
- With tube connector
- With one wedge head connection
- To extend scaffold inwards or outwards



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,39	3,90	100	004840	43,20
0,73	4,90	20	004841	44,50

BRACKET TUBE-SUPPORT METRIC



- Steel, hot dip galvanized
- Without tube connector
- With two wedge heads connections
- To extend scaffold inwards or outwards



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,41	3,50	100	005741	44,00
0,50	3,80	100	005742	44,10
0,75	6,00	20	004822	53,90

BRACKET LEDGER TUBE SUPPORT METRIC



- Steel, hot dip galvanized
- With one wedge head connection
- To support the steel deck for tube support in the width 0.24 m or 0.32 m



Width (m)	Weight (kg)	Article no.	Price (€)
0,29	1,50	005743	18,40
0,36	1,70	005744	19,40

BRACKET U-SUPPORT



- Steel, hot dip galvanized
- Without tube connector
- With one wedge head connection
- To extend scaffold with serial UNI-CONNECT decks



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,22	1,40	–	011691	34,90
0,32	1,80	20	012124	35,10

BRACKET U-SUPPORT



- Steel, hot dip galvanized
- With tube connector
- With one wedge head connection
- To extend scaffold with serial UNI-CONNECT decks



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,39	3,90	100	002223	36,00
0,50	5,10	20	005778	41,50
0,73	6,30	20	002224	42,30

BRACKET U-SUPPORT



- Steel, hot dip galvanized
- Without tube connector
- With one wedge head connection
- To extend scaffold with serial UNI-CONNECT decks



Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,73	6,50	20	007309	47,00

BRACKET U-SUPPORT



- Steel, hot dip galvanized
- Without tube connector
- With three wedge head connections
- To extend scaffold

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,09	12,00	20	002225	89,00



BRACKET O-SUPPORT



- Steel, hot dip galvanized
- Without tube connector
- With three wedge head connections
- To extend scaffold

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
1,09	11,60	20	010885	79,20



BRACKET UN-SUPPORT



- Steel, hot dip galvanized
- With wedge head connection
- Without strut
- Without tube connector

Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,16	1,20	25	011644	39,00
0,32	1,50	25	011642	43,10



BRACKET SUPPORT METRIC - UNI



- Steel, hot dip galvanized
- Without tube connector
- With two wedge head connections
- To extend scaffold inwards or outwards with serial UNI decks

Model	Width (m)	Weight (kg)	PU (pcs.)	Price (€)	Preis (€)
1-bohlig	0,41	3,30	100	004520	44,20
2-bohlig	0,74	5,90	20	004521	59,00



BASE JACK

EN

- Steel, hot dip galvanized
- With tube spindle
- Base plate 150 x 150 mm
- For adjusting level with differences in height of the underground
- Knurled nut with collar for centring the shaft on the spindle
- Lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length
- Can be used as a head spindle

Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,30	2,40	375	000318	14,40
0,50	3,10	300	000319	17,30
0,60	3,40	300	000320	17,80
0,78	3,90	250	000321	23,75
1,00	4,70	200	000322	29,00



SWIVEL BASE JACK

EN

- Steel, hot dip galvanized
- With tube spindle
- Swiveling base plate 150 x 150 mm
- For adjusting level with differences in height of the underground
- Knurled nut with collar for centring the shaft on the spindle
- Lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length
- Can be used as a head spindle
- Additional longitudinal scaffold bracing required at in the base
- Permissible load: 25.4 kN

Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,50	3,10	250	000323	41,70
0,80	4,30	200	013292	43,70



BASE JACK SOLID

EN

- Steel, hot dip galvanized
- With tube spindle
- Base plate 150 x 150 mm
- For adjusting level with differences in height of the underground
- Knurled nut with collar for centring the shaft on the spindle
- Can be used as a head spindle
- Without stoppers
- Permissible load: $N_{pL,Rd} = 197 \text{ kN}$, $M_{pL,Rd} = 105 \text{ kNcm}$, $V_{pL,Rd} = 85,2 \text{ kN}$


Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,60	6,70	200	007095	37,00



SPINDLE SECURITY



- Steel, hot dip galvanized
- With half coupler
- Serves for securing spindle and castor w when moving a scaffold with a crane

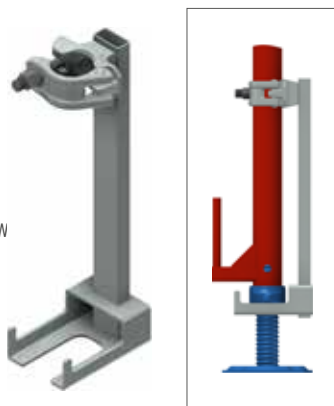


Height (m)	Weight (kg)	A/F	PU (pcs.)	Article no.	Price (€)
0,40	2,00	19	200	010294	24,08

BASE PLATE



- Steel, hot dip galvanized
- Base plate 150 x 150 mm
- With tube support approx. 60 mm high
- Directs the load from the standards to the foundation




Weight (kg)	Article no.	Price (€)
1,00	000090	14,00

SPINDLE FASTENING WITH WEDGE HEAD




- Steel, hot-dip galvanized
- Securing the base jack (and the starting collar) when lifting the scaffold with a crane
- Not suitable as a lift protection

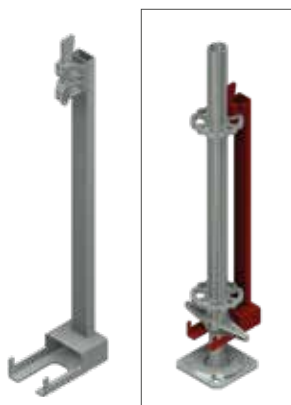

Length (m)	Weight (kg)	Article no.	Price (€)	Preis (€)
0,64	2,40	200	007165	24,60

PROTECTIVE PAD FOR BASE JACK

- Plastic
- With reflector



PU (pcs.)	Article no.	Price (€)
80	008110	3,80

HEAD JACK

- Steel, hot dip galvanized
- Supporting element for support and platform scaffolding as well as for formwork scaffolds
- Used to hold squares timbers, laminated beams and formwork beams



Opening dimension (mm)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
148	5,60	200	000693	30,30
180	8,30	-	011537	37,20

UNDERLAY WOODS

- As a load-distributing support
- Sawn
- Dimension +/- 10 mm



Length (m)	Width (m)	Height (m)	Weight (kg)	Article no.	Price (€)	Preis (€)
1,00	0,24	0,04	1,50	80	009203	9,20
1,50	0,24	0,04	2,25	80	010360	11,10

STANDARD COUPLER

EN

- Steel, hot dip galvanized, drop-forged
- Robust model
- For right-angled connection of tubes Ø 48.3 mm
- Class BB, EN 74-1 RA BB C3 M
- To be used in the classes B and BB of the steel and aluminum tube

Thread	A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
Standard	22	1,15	25	000325	7,80
Standard	19	1,15	25	000326	7,80
Quick	22	1,15	25	007521	8,40
Quick	19	1,15	25	007523	8,40



SWIVEL COUPLER

EN

- Steel, hot dip galvanized, drop-forged
- Robust model
- For any angular connection of tubes Ø 48.3 mm
- Class B, EN 74-1 SW B C3 M
- To be used in class B of the steel and aluminum tube

Thread	A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
Standard	22	1,35	25	000328	8,30
Standard	19	1,35	25	000329	8,30
Quick	22	1,35	25	007522	8,80
Quick	19	1,35	25	007524	8,80



HEXAGON COLLAR NUT

EN

- Thread M 14
- Strength class 5 as per EN 20898-2

Thread	A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
Standard	22	0,04	500	000165	0,45
Standard	19	0,03	500	000166	0,45
Quick	22	0,04	500	005105	0,55
Quick	19	0,03	500	006547	0,55



T-HEAD BOLT

EN

- Thread M 14
- Shaft length approx 68 mm
- Strength class 5.6 as per EN ISO 989-1

Thread	Weight (kg)	PU (pcs.)	Article no.	Price (€)
Standard	0,11	200	000164	0,50
Quick	0,11	200	005104	0,60



WEDGE HEAD COUPLER FIXED

EN

- Steel, hot dip galvanized, drop-forged
- With screw cap
- For connection of scaffold tubes to the perforated disc



A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
22	1,10	25	005859	22,00
19	1,10	25	005858	22,00

SWIVEL WEDGE HEAD COUPLER

EN

- Steel, hot dip galvanized, drop-forged
- With screw cap
- For connection of scaffold tubes to the perforated disc



A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
22	1,20	25	005861	24,50
19	1,20	25	005860	24,50

WEDGE HEAD COUPLER DOUBLE


- Steel, hot dip galvanized



Width (m)	Weight (kg)	Article no.	Price (€)
0,15	1,20	011125	22,00

DISTANCE COUPLER

- Steel tube $\varnothing$ 48.3 mm
- With two welded couplers, galvanized
- E. g. as connection between facade scaffold and a forward-placed stair ascent



Width (m)	A/F	Weight (kg)	Article no.	Price (€)
0,110	22	1,60	008225	16,90
0,154	19	1,80	008297	19,70
0,180	22	2,00	000233	20,30


PEFORATED DISC CLAMPABLE

- Ensures the possibility of mounting at the desired position along a standards or tubes $\varnothing$ 48.3 mm



A/F	Weight (kg)	PU (pcs.)	Article no.	Price (€)
22	1,00	25	002229	31,00
19	1,00	25	004587	31,00

**MORE COUPLERS
FIND IN OUR PRICE LIST
'ACCESSORIES'**

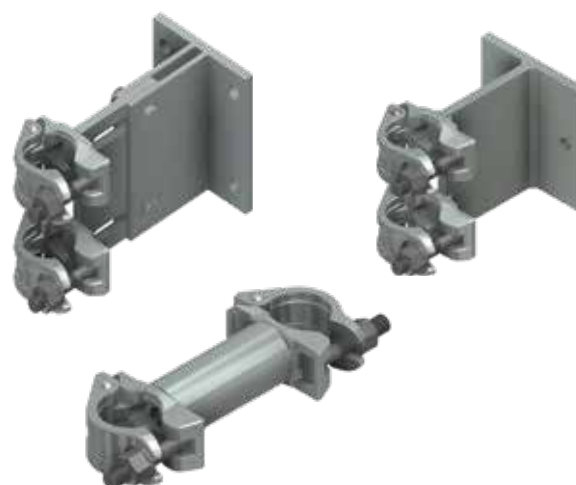

EYE BOLT Ø 12 MM



- Galvanized and welded
- For use with plastic expansion plugs 70/100 mm and plastic caps natural / black

Length (m)	Thread Length (mm)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
90	54	0,155	150	000358	1,30
120	65	0,175	150	000359	1,40
160	58	0,210	100	000360	1,50
190	65	0,235	100	000363	1,65
230	65	0,265	100	000361	1,80
300	65	0,300	50	002374	2,20
350	65	0,364	50	000362	2,30
400	65	0,424	50	006333	4,90
450	65	0,468	50	007555	5,10
500	65	0,530	50	002983	6,10



EYE BOLT M12



- Galvanized and welded
- With metric thread

Length (m)	Thread Length (mm)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
60	35	0,140	150	012379	4,10
80	35	0,150	150	012383	4,20
100	35	0,160	100	012384	4,30
120	35	0,175	100	012385	4,40
160	35	0,210	100	012386	4,60
220	35	0,260	50	012387	4,80



PLASTIC CAP



- For closing anchor drill holes

Colour	Weight (kg)	PU (pcs.)	Article no.	Price (€)
natural	0,003	100	000651	0,20
black	0,003	100	010353	0,20



EXPANSION PLUG



- For eye bolts with a timber thread Ø 12 mm
- For drilling Ø 14 mm

Length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,07	0,007	100	000357	0,40
0,10	0,007	100	011158	0,40



MJ-SCAFFY




- Screw-in aid for eye bolts
- With socket A/F 22 (for standard ratchet wrenches)
- With 3/4 inch square socket
- With SDS drill adapter



Weight (kg)	Article no.	Price (€)
0,374	012600	63,60


GUARD RAIL LEDGER

- Rectangular tube, hot dip galvanized
- -With hook and wedge head connection for hanging in the perforated disc
- Confusion and misuse due to rectangular tube excluded
- No subsequent installation or removal possible in the form of hooks / hooks
- Reduced transport volume, lower weight

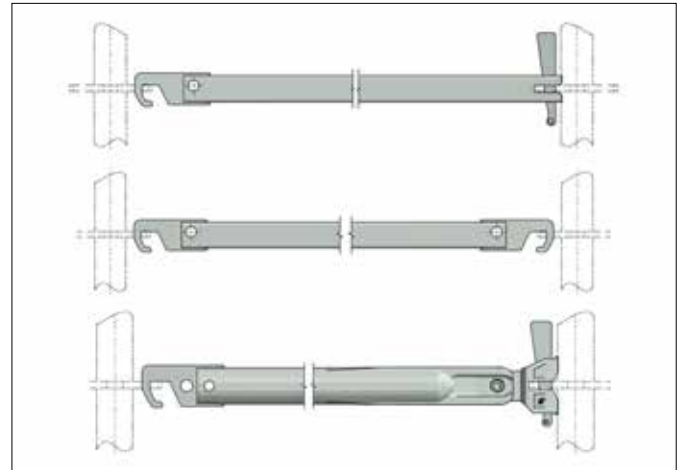


Model	Field length (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
CO Guard rail ledger hook / wedge	1,50	3,00	50	012466	41,40
CO Guard rail ledger hook / wedge	2,00	4,30	50	012467	42,65
CO Guard rail ledger hook / wedge	2,50	6,60	50	012468	47,00
CO Guard rail ledger hook / wedge	3,00	7,90	50	012469	48,00
CO Guard rail ledger hook / hook	1,50	2,90	50	012470	30,35
CO Guard rail ledger hook / hook	2,00	4,20	50	012474	31,50
CO Guard rail ledger hook / hook	2,50	6,50	50	012475	36,75
CO Guard rail ledger hook / hook	3,00	7,80	50	012476	42,95
CO Guard rail ledger hook / wedge	1,57	3,20	50	012477	41,40
CO Guard rail ledger hook / wedge	2,07	4,50	50	012478	42,65
CO Guard rail ledger hook / wedge	2,57	6,80	50	012479	47,00
CO Guard rail ledger hook / wedge	3,07	8,10	50	012480	48,00
CO Guard rail ledger hook / hook	1,57	3,10	50	012481	30,15
CO Guard rail ledger hook / hook	2,07	4,40	50	012482	31,50
CO Guard rail ledger hook / hook	2,57	6,70	50	012483	36,75
CO Guard rail ledger hook / hook	3,07	8,00	50	012484	42,95
CO guard rail ledger hook and rotating ledger head	1,57	5,70	50	012552	45,25
CO guard rail ledger hook and rotating ledger head	2,07	5,00	50	012457	47,70
CO guard rail ledger hook and rotating ledger head	2,57	7,30	50	012458	51,50
CO guard rail ledger hook and rotating ledger head	3,07	9,60	50	012459	52,30


Assembly sequence



Guard rail ledger at the top with the hook side hang on the perforated disc at +3.00 m



Vertical standard attach to the free ledger side

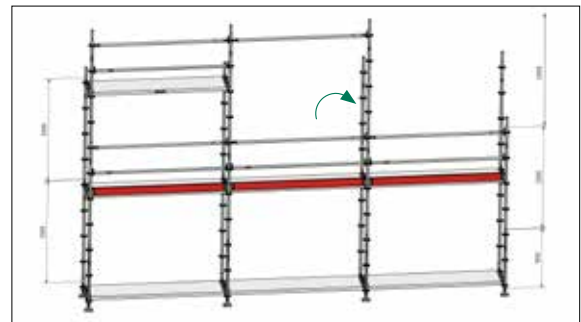

Vertical standard with guard rail ledger put on

SET - PERSONAL PROTECTIVE EQUIPMENT MILLER 1

EN N



- Revolution R2 Comfort harness – with 80 cm back eyelet extension (EN 361), elastic dura flex belt band, sharp edge tested, front and rear eyelet, comfort back pads, automatic fasteners for quick on and off, belt end clips, swivel connection at waist height for optimal ergonomics when bending or stretching, attachment point for tools and accessories, integrated label tray
- Lifetime of the material is 10 years
- Lanyards with shock absorber - length 2.00 m, sharp edges tested, horizontally approved (attachment point on foot level), 63 mm scaffold hook, stretchy design for more latitude of movement, safety clip for fastening to harness, Teflon-coated for longer life, EN 354 and EN 355
- Equipment bag - 0.27 x 0.80 m (D x H), made of PVC, red

Size	Article no.	Price (€)
S - M	006273	249,00
L - XL	005610	249,00



SET - PERSONAL PROTECTIVE EQUIPMENT MILLER 2

EN N



- Revolution R2 Comfort harness – with 80 cm back eyelet extension (EN 361), elastic dura flex belt band, sharp edge tested, front and rear eyelet, comfort back pads, automatic fasteners for quick on and off, belt end clips, swivel connection at waist height for optimal ergonomics when bending or stretching, attachment point for tools and accessories, integrated label tray
- Twin Manyard EDGE 2.00 m - with 2 x 63 mm aluminum hooks (EN 354 + 355), sharp edges tested, integrated shock absorber with fall of indicator
- Lifetime of the material is 10 years
- Equipment bag - 0.27 x 0.80 m (D x H), made of PVC, red

Size	Article no.	Price (€)
L - XL	011284	339,00



ALL SET COMPONENTS MAY ALSO BE ORDERED SEPARATELY

OTHER PROTECTIVE EQUIPMENT FIND IN OUR PRICELIST 'ACCESSORIES'



STACKING PALLET FOR TUBES




- Steel tube, hot-dip galvanized
- Specially suited for module scaffolds, e. g. standards, ledgers, guard rails, diagonal braces, tubes and toe boards
- Open all round
- Suited for stacked and crane transports
- The tubular supports are removable and are to be stowed securely in the base frame so that empty pallets can be transported and stacked in a very space-saving manner
- Special orders on request

Length (m)	Width (m)	Weight (kg)	PU (pcs.)	Article no.	Price (€)
0,85	0,85	30,50	5	006962	178,40
1,25	0,55	31,80	5	010334	186,10
1,25	0,85	35,00	5	005614	191,50
1,50	1,05	56,50	-	012209	232,50



**YOU CAN FIND ADDITIONAL
PRODUCTS FOR STORAGE AND
TRANSPORT IN OUR PRICE LIST
'ACCESSORIES'**



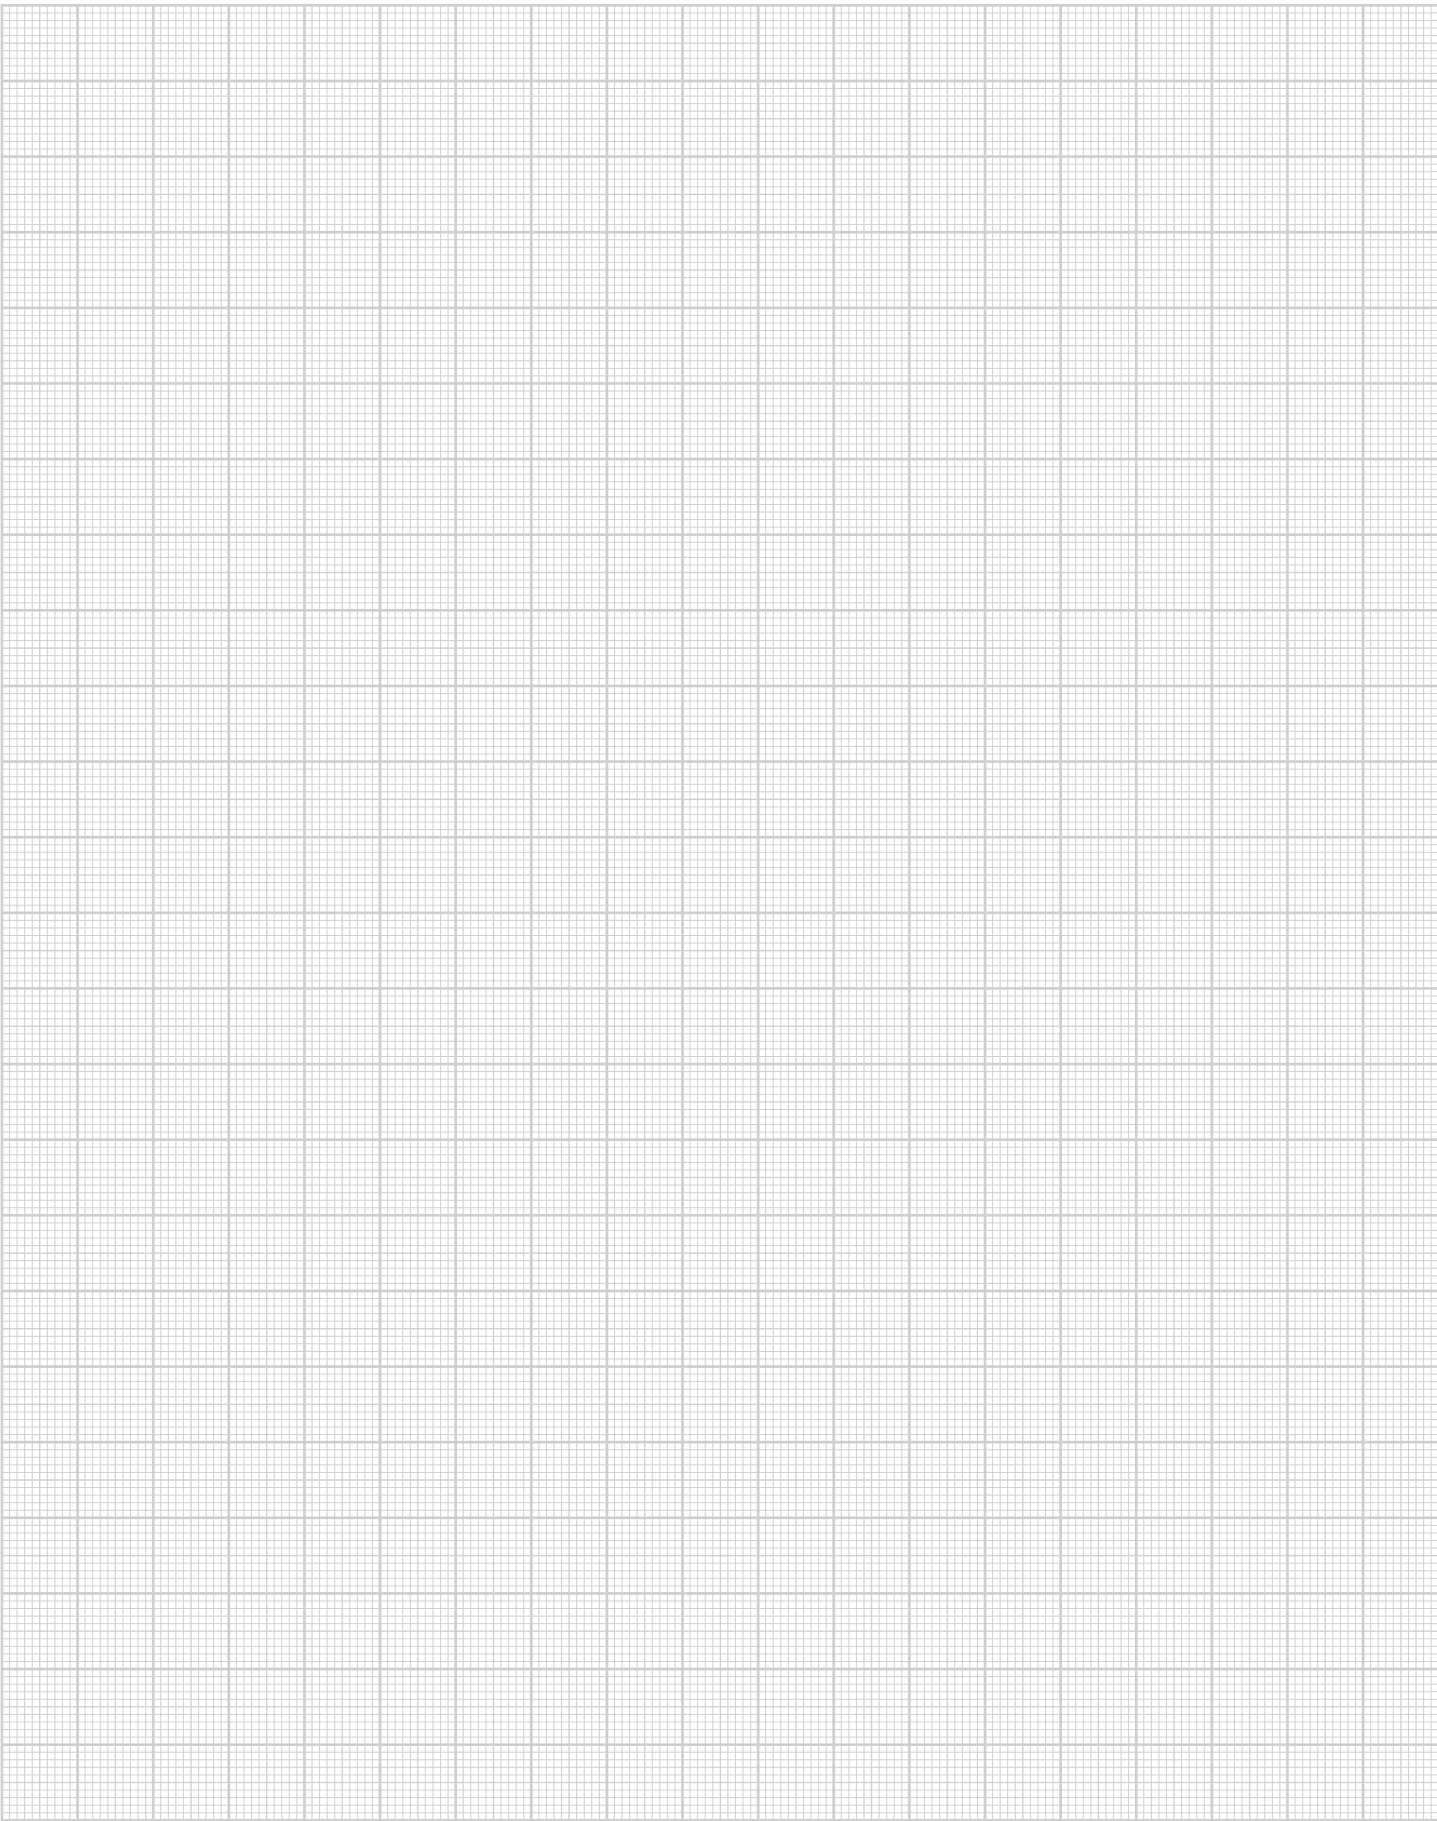



SIMPLY FILL OUT THE FORM AND SEND TO
Fax: +49 2391 8105 375 or E-mail: info@mj-geruest.de

Company	Customer no.
Street	Phone
Postal code, city, country	Fax
Name of buyer	E-mail

☐ ORDER ☐ INQUIRY

Order/Quotation please send ☐ by post ☐ by fax ☐ by e-mail

PRODUCT DESCRIPTION	ARTICLE NO.	QUANTITY	UNIT PRICE €	TOTAL VALUE €

ORDER VALUE €

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. In brief: place of business and jurisdiction is Plettenberg. Extended reservation of property rights until full payment of all our outstanding accounts are recieved. Our prices are ex work.

Date of delivery	Shipping method
Delivery address:	Freight costs
	Terms of delivery
	Terms of payment
	MJ-Consultant
	Stamp/Signature
	Date



MJ-GERÜST


Scaffolding Systems

**SACAFFOLD MADE IN
PLETTENBERG**




UNI-CONNECT

07er Frame scaffold




UNI

Metric frame scaffold




UNI TOP

Metric frame scaffold




COMBI

Modular scaffold



OPTIMA

Flexible façade scaffolding



ACCESSORIES

Universal



WWW.GERUESTLAGER.DE

© MJ-Gerüst GmbH | Changes and errors excepted | Edition 07.2021 | V2.5

MJ-Gerüst GmbH

Ziegelstraße 68
58840 Plettenberg
Germany

Hotline +49 2391 8105 350
Fax +49 2391 8105 375
E-mail info@mj-geruest.de
www.mj-geruest.de