




**MJ-GERÜST**  
Scaffolding Systems

[WWW.MJ-SCAFFOLDING.COM](http://WWW.MJ-SCAFFOLDING.COM)     



# UNI-CONNECT

**PRICES** | EDITION 04.2025



---

**SCAFFOLDING MADE IN  
PLETTENBERG**

**SCAFFOLDINGS MADE IN PLETTENBERG**

MJ-Gerüst GmbH, based in Plettenberg in the German region of Sauerland, is part of a strong group of companies, which can look back on more than 50 years of company history. The core competence of the family company lies in the production and worldwide distribution of high-quality steel and aluminum scaffolding systems, which offer almost limitless possibilities in the field of modern system scaffolding construction.

With a unique range of products and a wide range of universal accessories, we offer our customers the option of completing existing scaffolding material in a system-compatible complement. A highly valued advantage by our customers that has given our scaffolding international recognition and prominence.

Development, production and sales. These are the cornerstones of our range of services, which are supplemented by numerous additional services. Especially our support in the planning and implementation of difficult projects is claimed. A service in which our technical know-how and experience can often contribute to considerable time and cost savings.

Only through qualified work can a safe quality product be created. Our proven quality management reflects our knowledge and experience and makes the quality of our products measurable. In order to guarantee our high quality standards, our production processes are constantly accompanied by external examination offices and engineers.

**OUR COMPANY - YOUR BENEFITS**

- Production in Germany at the location Plettenberg
- System compatible, high quality and norm compliant scaffold systems
- Certifications according to DIN EN 9001, 14001 and 50001
- Highest product quality through dynamic quality management
- Short-term availability of material due to high storage capacities and short decision-making processes
- Use of the modern production technology and permanent optimization of technological production running
- Project support already in the planning phase

**PARTNER AND CERTIFICATES**


**BUNDESINNUNG  
GERÜSTBAU**

**MPA NRW**



**SGUV  
SESE  
SISP**  
Schweizerischer Gerüstbau-Unternehmer-Verband  
Société des Entrepreneurs Suisse en Echafaudages  
Società degli Imprenditori Svizzera del Ponteggio

**Deutsches  
Institut  
für  
Bautechnik**



**TYPKONTROLLERAD  
Arbetsmiljöverkets  
krav AFS 2013:4**



**INDAN**  
PERFECCIONANDO A LOS ESPECIALISTAS EN ANDAMIOS



# WWW.MJ-SCAFFOLDING.COM



|                                 |    |
|---------------------------------|----|
| The System                      | 04 |
| Base jacks                      | 06 |
| Base ledger                     | 07 |
| Frames                          | 08 |
| Decks                           | 12 |
| Climb up                        | 14 |
| Reinforcement                   | 16 |
| Guard rails                     | 17 |
| Toe boards                      | 18 |
| Upper close-off and roofguard   | 19 |
| Double end guard rail           | 24 |
| Anchoring                       | 25 |
| Brackets                        | 28 |
| Climb up, Stairs                | 33 |
| Gap cover for stairs            | 35 |
| Stairs                          | 36 |
| Cross ledger                    | 37 |
| Deck fastenings                 | 38 |
| Gap cover                       | 40 |
| End guard rail                  | 41 |
| Brackets                        | 42 |
| Weather protection              | 43 |
| Rolling tower and castors       | 44 |
| Head and base attachments       | 45 |
| Couplers, scaffold tubes        | 46 |
| Lattice beams                   | 48 |
| Storage and transport           | 50 |
| Safety during scaffold assembly | 51 |
| Scaffold examples               | 55 |
| Notes                           | 58 |
| Order form                      | 59 |

Made in Plettenberg

Net price, not discountable

European standard

Grant BG BAU

Individual identification

Delivery time on request

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. An excerpt: place of business and jurisdiction is Plettenberg. Extended retention of title until full payment of all outstanding claims. Our prices are ex works.

## UNI-CONNECT: FAST - SAFE - VERSATILE

The wedge lock on the one hand and the U-profile upper cross truss of the vertical frame, in which the scaffold decks are easily hooked on the other hand, make the UNI-CONNECT system easy to use and fast to assembly and disassemble. At the same time these are the essential security features of the system. Thus, the wedge, the connecting element between assembly frame, diagonals and guard rails, by its special inclination and surface texture, a secure and strong clamping action.

The decks are placed in the U-profiles with two or three claws, depending on the width, and ensure that dead load and traffic loads are safely discharged, this reinforces the whole system and results in a firm connection between the individual scaffold bays.

The UNI-CONNECT scaffold system can be used as a guard and roof guard scaffold, and the use of a protective roof is proven in the standard implementation.

Extensive and functionally coordinated accessory components provide the system with flexibility that makes it easy to install even with difficult tasks. UNI-CONNECT is available in both steel and aluminum versions.



### EFFICIENT

due to optimized ease of assembly



### PROFITABLE

through long life and excellent value retention



### FLEXIBLE

through countless field lengths/widths





### VERSATILE

through extensive range of accessories



## THE ESSENTIAL BENEFITS OF THE SYSTEM IN OVERVIEW

- Scaffold frame with U-profile for flexible mounting of scaffold decks
  - Facilitated partial degradation due to optimized claw geometry
  - Gen. approved by building inspection, also for common, manufacturer independent use.
- For details on type and scope, please refer to the approval models: Z-8.1-872, Z-8.1-922, Z-8.1-935

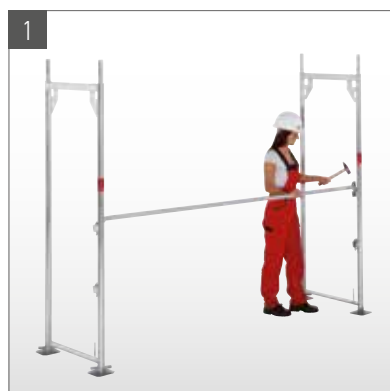

Set up the base jacks, attach assembly frame and connect the guard rails.



Mount vertical diagonal brace, install horizontal brace (only in the diagonal bay).




Mount deck.



Align the scaffold with a spirit level on the guard rail and the vertical frame vertically.



Hang up the interior ladder walkway.

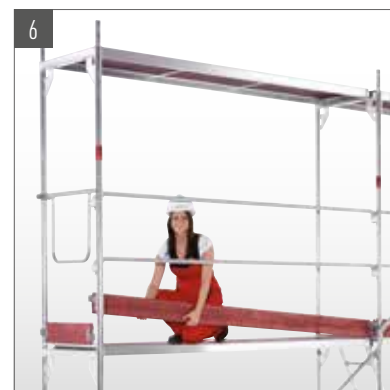

Mount assembly frame and decks of the next layer and hang diagonal, guard rail and toe boards.

Visit us on:



[WWW.GERUESTLAGER.DE](http://WWW.GERUESTLAGER.DE)

## UNTERLAGHÖLZER

- As a load-distributing support
- Sawn
- Dimension +/- 10 mm


| Length (m) | Width (m) | Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|------------|-------------|-----------|-------------|-----------|
| 1,00       | 0,24      | 0,04       | 1,50        | 80        | 009203      | 10,20     |
| 1,50       | 0,24      | 0,04       | 2,25        | 80        | 010360      | 12,30     |



## PROTECTIVE PAD FOR BASE JACK

- Plastic
- With reflector

| PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----------|
| 80        | 008110      | 4,40      |



## RUBBER PAD FOR BASE JACK

- Made from recycled cable material
- Oil and acid resistant
- Stackable (015339)

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,03       | 0,24      | 1,60        | 80        | 015338      | 15,10     |
| 0,03       | 0,24      | 1,50        | 80        | 015339      | 15,10     |



## BASE JACK

EN

- Steel, hot dip galvanized
- With tube spindle
- Base plate 150 x 150 mm
- For adjusting level with differences in height of the underground
- Knurled nut with collar for centring the shaft on the spindle
- Lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length
- Can be used as a head spindle

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,30       | 2,40        | 375       | 000318      | 17,80     |
| 0,50       | 3,10        | 300       | 000319      | 21,30     |
| 0,60       | 3,40        | 300       | 000320      | 22,00     |
| 0,78       | 3,90        | 250       | 000321      | 29,80     |
| 1,00       | 4,70        | 200       | 000322      | 35,70     |



## SWIVEL BASE JACK

EN

- Steel, hot dip galvanized
- With tube spindle
- Swiveling base plate 150 x 150 mm
- For adjusting level with differences in height of the underground
- Knurled nut with collar for centring the shaft on the spindle
- Lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length
- Can be used as a head spindle
- Additional longitudinal scaffold bracing required at in the base
- Permissible load: 25.4 kN



| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,50       | 3,10        | 250       | 000323      | 46,30     |
| 0,80       | 4,30        | 200       | 013292      | 54,50     |

## BASE LEDGER



- Aluminum
- As lower attachment for the aluminum stairs
- For setting up a deck area in the base section for inside scaffold access



| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,73      | 3,00        | 000595      | 40,00     |
| 1,09      | 5,40        | 009148      | 49,20     |

**YOU WILL FIND MORE PARTS ON PAGE 45  
AND OUR PRICE LIST “ACCESSORIES”.**

## ASSEMBLY FRAME STEEL 70



- Steel tube Ø 48.3 mm, hot dip galvanized
- U-profile to mount the decks

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,66       | 0,73      | 10,40       | 66        | 000446      | 78,60     |
| 1,00       | 0,73      | 12,20       | 44        | 000855      | 86,10     |
| 1,50       | 0,73      | 15,70       | 22        | 000856      | 87,50     |
| 2,00       | 0,73      | 17,80       | 22        | 000853      | 88,80     |



## ASSEMBLY FRAME STEEL 100



- Steel tube Ø 48.3 mm, hot dip galvanized
- U-profile to mount the decks
- Meets the requirements of width class A/F 09 and is designed for highly loaded scaffolds up to load class 6

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,66       | 1,09      | 13,40       | 66        | 000456      | 95,20     |
| 1,00       | 1,09      | 15,90       | 44        | 000859      | 101,50    |
| 1,50       | 1,09      | 20,20       | 22        | 000861      | 110,60    |
| 2,00       | 1,09      | 23,40       | 22        | 000858      | 111,80    |



## ASSEMBLY FRAME STEEL 70/100



- Steel tube Ø 48.3 mm, hot dip galvanized
- U-profile to mount the decks
- With four rail housings for inside and outside guard rails

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,00       | 0,73      | 17,90       | 22        | 008095      | 113,70    |
| 2,00       | 1,09      | 23,50       | 22        | 006817      | 133,00    |



008095



006817



#### TUBE CONNECTOR

Molded tube connector with slim collar for high load-bearing capacity and at the same time optimized stackability.



#### GUSSED PLATE

Welded corner reinforcement allows play-free fastening of vertical diagonals as well a double coupling connection.



#### RAIL HOUSINGS

Guard rail support with new, improved wedge geometry for secure positive and non-positive reception of up to two back guard rails.



#### TOE BOARD HOLDER

Integrated deck fastening protection with toe board holder. Position and geometry ensure a reliable of the lift-off preventer of scaffold decks. A part dismantling of the scaffold is possible at any time.

## ASSEMBLY FRAME ALUMINUM 70



- Aluminum tube Ø 48.3 mm
- U-profile to mount the decks
- Low dead weight with high strength at the same time

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,66       | 0,73      | 4,20        | 66        | 000459      | 90,90     |
| 1,00       | 0,73      | 5,40        | 44        | 000864      | 108,80    |
| 1,50       | 0,73      | 7,70        | 22        | 002818      | 129,90    |
| 2,00       | 0,73      | 8,60        | 22        | 000863      | 136,30    |



## ASSEMBLY FRAME STEEL 1-BOARD



- Steel tube Ø 48.3 mm, hot dip galvanized
- U-profile to mount the decks

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,66       | 0,36      | 8,60        | 66        | 000605      | 95,40     |
| 1,00       | 0,36      | 10,60       | 44        | 000604      | 98,40     |
| 2,00       | 0,36      | 18,30       | 22        | 000876      | 100,50    |



## ASSEMBLY FRAME 70/100 FOR ROOF OVERHANG



- Steel tube Ø 48.3 mm, hot dip galvanized
- U-profile to mount the decks
- For converting roof overhangs and building protrusions
- Above this frame up to four further scaffold levels are possible

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,00       | 0,73      | 22,00       | 22        | 000862      | 179,80    |
| 2,00       | 1,09      | 24,00       | 22        | 000452      | 196,60    |



## ROOFGUARD FRAME



- Steel tube Ø 48.3 mm, hot dip galvanized
- For broadening the scaffold UC 70 by one deck width
- Particularly suitable for the construction of roof scaffolding according to DIN 4420
- The transition from UC 70 to UC 100 is easily possible



| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,00       | 1,09/0,73 | 24,50       | 22        | 011034      | 125,10    |

## THROUGH-PASSAGE FRAME 1.50 M



- Steel tube Ø 48.3 mm, hot dip galvanized
- Passage for pedestrains and pedestrian protection
- Tube connector for frame widths 0.73 and 1.09 m which can be mounted in different ways
- The reinforcement in longitudinal direction is performed by system diagonals in connection with horizontal braces



| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,20       | 1,50      | 35,20       | 22        | 003152      | 253,20    |

## THROUGH-PASSAGE FRAME 1.09 M



- Steel tube Ø 48.3 mm, hot dip galvanized
- Passage width 1.00 m for narrow mounting surface
- Four outer rail housings increase the passage width
- The additionally mounted tube connector enables a continuous construction with the frame 0.73 m



| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,20       | 1,09      | 30,70       | 22        | 010933      | 245,30    |

## STEEL DECK OPTI-LINE 0.32 M



- Steel, hot dip galvanized
- Extremely robust, for the toughest operations
- Non-slip surface through pronounced hole profiling
- Reducing the wall thickness and optimized hole profiling
- leads to weight savings
- Good stackability due to the guide grooves at the edges
- Complies with the requirements of DIN EN 12811
- Can be used in guard and roofguard scaffolds as per DIN 4420



**STRONGER DUE TO  
NEW SURFACE**



| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 0,73       | 0,32      | 5,60        | 6          | 60/80     | 008770      | 66,60     |
| 1,09       | 0,32      | 7,70        | 6          | 60/80     | 008771      | 67,80     |
| 1,40       | 0,32      | 9,30        | 6          | 60/80     | 011731      | 69,00     |
| 1,57       | 0,32      | 10,90       | 6          | 60/80     | 008772      | 69,70     |
| 2,07       | 0,32      | 13,90       | 6          | 60/80     | 008773      | 78,20     |
| 2,57       | 0,32      | 16,90       | 5          | 60/80     | 008774      | 90,30     |
| 3,07       | 0,32      | 19,80       | 4          | 60/80     | 008775      | 102,60    |
| 4,14       | 0,32      | 31,00       | 3          | 60/80     | 008766      | 200,50    |

## STEEL DECK 0.19 M



- Steel, hot dip galvanized
- Levelling deck for closing gaps in staging scaffolding and brackets
- Non-slip surface through pronounced hole profiling
- Good stackability due to the guide grooves at the edges



| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 0,73       | 0,19      | 4,20        | 6          | 100/120   | 008780      | 47,70     |
| 1,09       | 0,19      | 6,40        | 6          | 100/120   | 008781      | 56,70     |
| 1,57       | 0,19      | 8,50        | 6          | 100/120   | 008782      | 58,30     |
| 2,07       | 0,19      | 10,60       | 6          | 100/120   | 008783      | 67,90     |
| 2,57       | 0,19      | 12,70       | 5          | 100/120   | 008784      | 79,40     |
| 3,07       | 0,19      | 15,90       | 4          | 100/120   | 008785      | 92,30     |

## ALUMINUM DECK WITH STEEL CAPS 0,61 M



- Non-slip surface and easy to stack
- Optimized ratio of weight and carrying through computerassisted profile optimization
- Steel caps with optimized hanging claws, therefore robust and durable  
Patented profile design with beam reinforcements in the running area ensure low deflection and very good slip resistance

| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 0,73       | 0,61      | 6,80        | 6          | 18        | 006625      | 131,80    |
| 1,09       | 0,61      | 8,80        | 6          | 18        | 006627      | 154,60    |
| 1,40       | 0,61      | 11,90       | 6          | 18        | 006629      | 176,10    |
| 1,57       | 0,61      | 13,40       | 6          | 18        | 006631      | 175,00    |
| 2,07       | 0,61      | 14,50       | 6          | 18        | 006632      | 212,00    |
| 2,57       | 0,61      | 17,10       | 5          | 18        | 006633      | 250,40    |
| 3,07       | 0,61      | 20,30       | 4          | 18        | 006634      | 284,50    |



## ALUMINUM DECK WITH STEEL CAPS 0,32 M



- Non-slip surface and easy to stack
- Optimized ratio of weight and carrying through computerassisted profile optimization
- Steel caps with optimized hanging claws, therefore robust and durable
- Beam reinforcements in the walking area ensure minimal deflection and the greatest possible slip resistance
- Not for use on U-decking ledgers 0.73 m

| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 0,73       | 0,32      | 3,80        | 6          | 18        | 012323      | 115,90    |
| 1,09       | 0,32      | 5,10        | 6          | 18        | 012324      | 121,80    |
| 1,40       | 0,32      | 6,30        | 6          | 18        | 012325      | 124,70    |
| 1,57       | 0,32      | 6,90        | 6          | 18        | 012326      | 128,10    |
| 2,07       | 0,32      | 8,80        | 6          | 18        | 012327      | 151,10    |
| 2,57       | 0,32      | 10,70       | 5          | 18        | 012328      | 173,30    |
| 3,07       | 0,32      | 12,50       | 4          | 18        | 012329      | 199,80    |



## ALUMINUM DECK WITH STEEL CAPS 0,19 M



- Non-slip surface and easy to stack
- Optimized ratio of weight and carrying through computerassisted profile optimization
- Steel caps with optimized hanging claws, therefore robust and durable

| Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,73       | 0,19      | 3,04        | 18        | 013791      | 52,30     |
| 1,09       | 0,19      | 4,10        | 18        | 013792      | 54,30     |
| 1,40       | 0,19      | 5,00        | 18        | 013793      | 70,10     |
| 1,57       | 0,19      | 5,54        | 18        | 013794      | 90,70     |
| 2,07       | 0,19      | 7,00        | 18        | 013795      | 109,70    |
| 2,57       | 0,19      | 8,50        | 18        | 013796      | 127,70    |
| 3,07       | 0,19      | 10,00       | 18        | 013797      | 151,80    |



## COMBI DECK WITH PLYWOOD PANEL



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- Robust riveted head profiles and steel connections claws, hot dip galvanized

| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 0,73       | 0,61      | 6,30        | 3          | 14        | 000479      | 112,60    |
| 1,09       | 0,61      | 8,40        | 3          | 14        | 003195      | 126,20    |
| 1,57       | 0,61      | 13,20       | 3          | 14        | 000481      | 150,20    |
| 2,07       | 0,61      | 17,00       | 3          | 14        | 000482      | 167,50    |
| 2,57       | 0,61      | 20,00       | 3          | 14        | 000483      | 191,10    |
| 3,07       | 0,61      | 23,00       | 3          | 14        | 000484      | 226,00    |



**YOU CAN FIND MORE DECKS FOR SPECIAL SOLUTIONS ON PAGE 38.**

## COMBI ACCESS DECK



- With non-slip deck aluminum
- With integrated aluminum ladder (Length 2.07 m extendable)
- Access flap made of corrugated sheet metal with safety lock, opening to the back
- Easy release of the integrated access ladder, also from the soil surface possible
- Head profiles and optimized connection claws from steel, hot dip galvanized

| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 2,07       | 0,61      | 23,30       | 4          | 14        | 009872      | 415,80    |
| 2,57       | 0,61      | 23,70       | 4          | 14        | 000486      | 368,70    |
| 3,07       | 0,61      | 26,70       | 3          | 14        | 000488      | 411,50    |



## COMBI ACCESS DECK FLAP SIDE



- With non-slip deck aluminum
- With integrated aluminum ladder
- Access flap made of corrugated sheet metal with safety lock, open to the side
- Easy release of the integrated access ladder also from the soil surface possible
- Head profiles and optimized connection claws from steel, hot dip galvanized


| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 2,57       | 0,61      | 24,20       | 4          | 14        | 006522      | 473,30    |
| 3,07       | 0,61      | 27,20       | 3          | 14        | 006523      | 522,90    |



## COMBI ACCESS DECK WITH PLYWOOD PANEL



- With water-resistant, non-slip and lightweight plywood panel 12 mm, BFU-100 G-12
- With integrated aluminum ladder
- Robust riveted head profiles and steel connections claws, hot dip galvanized

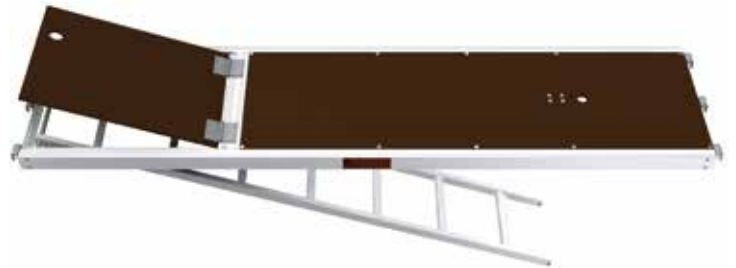

| Length (m) | Width (m) | Weight (kg) | Load class | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|------------|-----------|-------------|-----------|
| 2,57       | 0,61      | 24,00       | 3          | 14        | 000492      | 312,40    |
| 3,07       | 0,61      | 29,00       | 3          | 14        | 000494      | 356,30    |

## COMBI ACCESS DECK WITHOUT LADDER



- With non-slip deck aluminum
- Without integrated ladder
- Access flap made of corrugated sheet metal with safety lock, opening backwards
- Head profiles and optimized connection claws from steel, hot dip galvanized



| Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,57       | 0,61      | 11,00       | 14        | 009079      | 279,90    |
| 2,07       | 0,61      | 17,50       | 14        | 000490      | 295,70    |
| 2,57       | 0,61      | 20,00       | 14        | 002250      | 346,40    |
| 3,07       | 0,61      | 25,00       | 14        | 000489      | 394,00    |

## ACCESS LADDER



- As a separate ladder for the inside scaffold climbing
- With riveted claws for safe mounting to the access decks



| Model     | Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-----------|------------|-----------|-------------|-----------|-------------|-----------|
| aluminium | 2,16       | 0,40      | 3,00        | –         | 001323      | 80,70     |
| steel     | 2,16       | 0,40      | 10,50       | 80        | 000172      | 79,90     |

## DIAGONAL BRACE



- Steel tube Ø 42.4 mm, hot dip galvanized
- With swivel wedge coupler
- Strong vertical bracing of the scaffold parallel to the facade

| Field (m) | Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-----------|------------|-------------|-----------|-------------|-----------|
| 1,57      | 2,40       | 6,00        | 50        | 000546      | 39,90     |
| 2,07      | 2,80       | 6,50        | 50        | 000554      | 40,80     |
| 2,57      | 3,20       | 7,00        | 50        | 000552      | 42,80     |
| 3,07      | 3,60       | 8,30        | 50        | 000553      | 45,60     |



## HORIZONTAL BRACE



- Steel tube Ø 48.3 mm, hot dip galvanized
- With welded half couplers
- Mounting for bracing in the diagonal bay above the base jack

| Field (m) | Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-----------|------------|-------------|-----------|-------------|-----------|
| 1,57      | 1,57       | 7,20        | 50        | 008207      | 70,40     |
| 2,07      | 2,07       | 9,00        | 50        | 000548      | 72,10     |
| 2,57      | 2,57       | 10,80       | 50        | 000550      | 77,00     |
| 3,07      | 3,07       | 12,60       | 50        | 000551      | 90,70     |




## CROSS DIAGONAL



- Steel, hot dip galvanized
- With two half couplers
- For bracing assembly frame vertical to the facade and for supporting brackets

| Model   | Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|---------|------------|-------------|-----------|-------------|-----------|
| 2-board | 1,77       | 5,30        | 50        | 000588      | 53,10     |
| 3-board | 1,95       | 5,80        | 50        | 000587      | 55,90     |

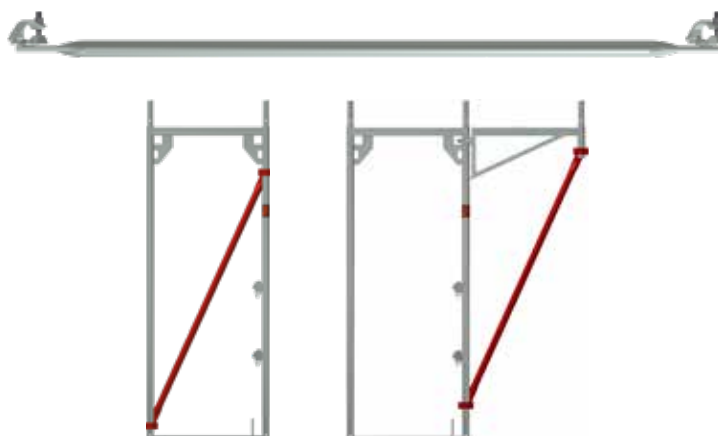

## GUARD RAIL



- Steel tube Ø 33.7 mm, hot dip galvanized

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,73       | 1,30        | 100       | 000499      | 18,60     |
| 1,09       | 1,90        | 100       | 000500      | 19,30     |
| 1,40       | 2,60        | 200       | 015616      | 19,80     |
| 1,57       | 2,80        | 100       | 000501      | 20,10     |
| 2,07       | 3,70        | 100       | 000502      | 21,50     |
| 2,57       | 4,60        | 100       | 000503      | 23,10     |
| 3,07       | 5,50        | 100       | 000504      | 24,60     |



## DOUBLE GUARD RAIL



- Steel tube Ø 33.7 mm, hot dip galvanized

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,73       | 4,10        | 40        | 000506      | 41,80     |
| 1,09       | 5,40        | 40        | 000507      | 45,70     |
| 1,40       | 6,50        | 40        | 015617      | 49,40     |
| 1,57       | 7,20        | 40        | 000509      | 50,20     |
| 2,07       | 9,80        | 40        | 000510      | 54,50     |
| 2,57       | 11,80       | 40        | 000511      | 57,80     |
| 3,07       | 13,50       | 40        | 000512      | 66,50     |
| 4,14       | 21,00       | 40        | 000513      | 118,50    |



## DOUBLE END GUARD RAIL ALUMINUM WITH DIAGONAL STRUTS



- Aluminum tube Ø 40 mm
- Diagonal struts for stability and extra protection

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 1,57       | 3,70        | 30        | 009244      | 72,90     |
| 2,07       | 4,80        | 30        | 009660      | 98,70     |
| 2,57       | 6,50        | 30        | 007697      | 108,30    |
| 3,07       | 7,30        | 30        | 007698      | 124,80    |



## TOE BOARD



- Impregnated timber
- Galvanized steel fittings
- For attaching onto the toe board pins of the assembly frame as a part of the complete three-part side protection

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,73       | 1,50        | 80        | 000537      | 16,50     |
| 1,09       | 2,50        | 80        | 000538      | 18,30     |
| 1,29       | 2,80        | 80        | 010812      | 19,40     |
| 1,40       | 3,10        | 80        | 014756      | 20,50     |
| 1,57       | 3,00        | 80        | 000539      | 20,10     |
| 2,07       | 4,00        | 80        | 000540      | 21,40     |
| 2,57       | 4,80        | 80        | 000541      | 23,10     |
| 3,07       | 6,50        | 80        | 000542      | 25,10     |



**INDIVIDUAL COLOURS AND  
PRINTING ON REQUEST**

## END TOE BOARD



- Timber
- Galvanized steel fittings
- For end side protection

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,73       | 1,50        | 100       | 000544      | 15,00     |
| 1,09       | 2,00        | 100       | 000545      | 17,20     |



## ALUMINUM TOE BOARD



- Aluminum
- Galvanized steel fittings
- For attaching onto the toe board pins of the assembly frame as a part of the complete three-part side protection

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |  |
|------------|-------------|-----------|-------------|-----------|--|
| 0,73       | 1,50        | 80        | 010142      | 29,30     |  |
| 1,09       | 2,00        | 80        | 010143      | 35,10     |  |
| 1,57       | 2,80        | 80        | 010144      | 40,90     |  |
| 2,07       | 3,60        | 80        | 010145      | 51,00     |  |
| 2,57       | 4,40        | 80        | 010146      | 60,80     |  |
| 3,07       | 5,20        | 80        | 010147      | 70,80     |  |
| 4,14       | 6,90        | 80        | 014000      | 81,00     |  |




## ALUMINUM END TOE BOARD



- Aluminum
- Galvanized steel fittings
- For end side protection

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |  |
|------------|-------------|-----------|-------------|-----------|--|
| 0,73       | 1,44        | 100       | 008668      | 27,60     |  |
| 1,09       | 2,00        | 100       | 016029      | 32,40     |  |



## GUARD RAIL POST



- Steel tube Ø 48.3 mm, hot dip galvanized
- For mounting guard rails, toe boards and fastening scaffolding decks to the top scaffold platform
- Securing against lift-off by security pin

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,00       | 0,73      | 6,50        | 44        | 000867      | 51,10     |
| 1,00       | 1,09      | 7,30        | 44        | 000869      | 53,40     |



## GUARD RAIL POST ALUMINUM



- Aluminum tube Ø 48.3 mm
- For mounting guard rails, toe boards and fastening scaffolding decks to the top scaffold platform
- Securing against lift-off by security pin

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,00       | 0,73      | 2,80        | 44        | 000870      | 65,00     |



## INSIDE GUARD RAIL POST WITH TOE BOARD PIN



- Steel, hot dip galvanized
- For attaching additional inside guard rails to the assembly frame
- Quick installation with wedge lock

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,99       | 3,29        | 100       | 006137      | 41,40     |




## END GUARD RAIL



- Steel tube Ø 48.3 mm, hot dip galvanized
- Forms side guard and deck fastening on the top scaffold platform
- Security against lift off by security pin

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,00       | 0,73      | 12,00       | 22        | 000865      | 91,60     |
| 1,00       | 1,09      | 14,70       | 22        | 000556      | 103,00    |

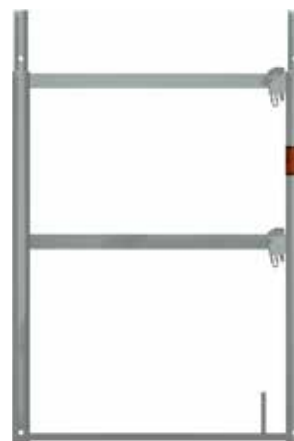

## END GUARD RAIL ALUMINUM



- Aluminum tube Ø 48.3 mm
- Forms side guard and deck fastening on the top scaffold platform
- Security against lift off by security pin

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,00       | 0,73      | 5,30        | 22        | 000866      | 119,30    |



## SINGLE GUARD RAIL POST



- Steel tube Ø 48.3 mm, hot dip galvanized
- With tube connector and short deck fastening
- For use with single-board brackets
- For mounting guard rails, toe boards and fastening scaffolding decks to the top scaffold platform
- Securing against lift-off by security pin



| Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 1,00       | 5,10        | 50        | 000871      | 37,10     |

## SINGLE GUARD RAIL POST ALUMINUM



- Aluminum tube Ø 48.3 mm
- With tube connector and short deck fastening
- For use with single-board brackets
- For mounting guard rails, toe boards and fastening scaffolding decks to the top scaffold platform
- Securing against lift-off by security pin



| Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 1,00       | 2,10        | 50        | 000872      | 50,40     |

## SINGLE GUARD RAIL POST



- Steel tube Ø 48.3 mm, hot dip galvanized
- With tube connector
- Without deck fastening
- For holding from two guard rails
- Used when a toe board is not required



| Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 1,00       | 4,70        | 50        | 000873      | 37,00     |

## GUARD RAIL FOR ROOF GUARD 0.73 M



- Steel tube Ø 48.3 mm, hot dip galvanized
- For use on vertical frames and brackets 0.36, 0.50 and 0.73 m
- For securing the top deck level and fastening roof guard nets
- In conjunction with guard rails, also suitable for attaching toe boards, side protection nets and roof safety nets
- Approved for the setting up of guard and roof guard scaffolds as per DIN 4420

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,00       | 0,73      | 12,00       | 44        | 007354      | 114,80    |



## GUARD RAIL FOR ROOF GUARD 1.09 M



- Steel tube Ø 48.3 mm, hot dip galvanized
- For securing the top deck level and fastening roof guard nets
- In conjunction with guard rails, also suitable for attaching toe boards, side protection nets and roof safety nets
- Approved for the setting up of guard and roofguard scaffolds as per DIN 4420

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 2,00       | 1,09      | 14,00       | 44        | 000563      | 120,00    |



GUARD RAIL POST 2.00 M



- Steel tube Ø 48.3 mm, hot dip galvanized
- With tube connector and short deck fastening
- Its use in guard and roof guard scaffolds is only permitted with reinforcement



| Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 2,00       | 9,50        | 50        | 000875      | 76,80     |



REINFORCEMENT FOR ROOF RAIL



- Steel, hot-dip galvanized
- With three half couplers
- To reinforce the guard rail post 2.00 m



| Height (m) | Weight (kg) | A/F | Article no. | Price (€) |
|------------|-------------|-----|-------------|-----------|
| 1,30       | 7,50        | 22  | 010063      | 55,00     |

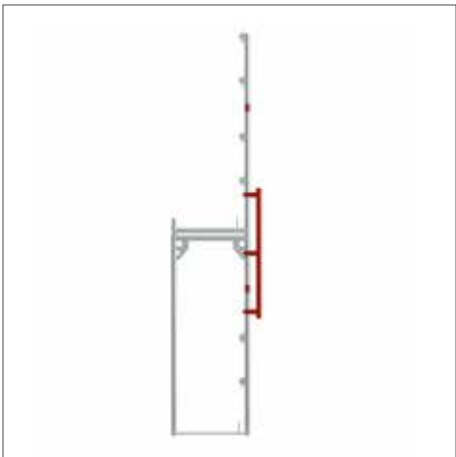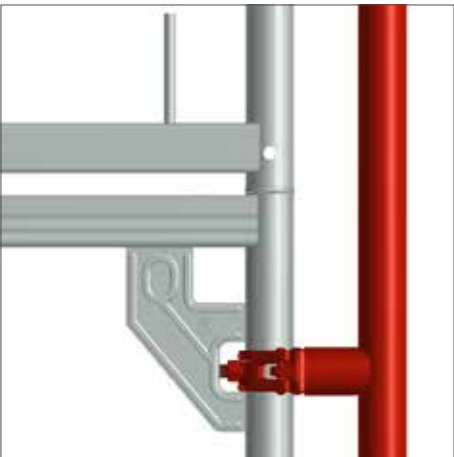

DOUBLE END GUARD RAIL



- Steel tube Ø 33.7 mm or 26.9 mm, hot dip galvanized
- For double side protection at the ends

| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,73      | 3,40        | 19  | 25        | 000530      | 40,00     |
| 1,09      | 3,80        | 19  | 25        | 000531      | 45,40     |
| 0,73      | 3,40        | 22  | 25        | 006951      | 40,00     |
| 1,09      | 3,80        | 22  | 25        | 009676      | 45,40     |



## WALL TIE



- Steel tube Ø 48.3 mm, hot dip galvanized
- Installation as short wall tie with one standard coupler
- Installation as long wall tie with two standard couplers

| Length (m) | Weight (kg) | Article no. | Price (€) |
|------------|-------------|-------------|-----------|
| 0,30       | 1,40        | 000240      | 13,00     |
| 0,40       | 1,80        | 000242      | 14,40     |
| 0,50       | 2,00        | 000125      | 15,10     |
| 0,60       | 2,60        | 000241      | 16,40     |
| 0,80       | 3,20        | 000129      | 18,40     |
| 1,00       | 3,80        | 000127      | 20,40     |
| 1,30       | 4,80        | 000131      | 21,40     |
| 1,50       | 5,50        | 000132      | 24,70     |



## WALL TIE



- Steel tube Ø 48.3 mm, hot dip galvanized
- Hook is welded at the inside
- Enables close to the façade in conjunction with anchor bridge WDVScconnection of scaffold couplers



| Length (m) | Weight (kg) | Article no. | Price (€) |
|------------|-------------|-------------|-----------|
| 0,18       | 0,95        | 009190      | 15,30     |



## WALL TIE WITH PLATE



- Steel tube Ø 48.3 mm, hot dip galvanized
- Installation with a standard coupler



| Length (m) | Weight (kg) | Article no. | Price (€) |
|------------|-------------|-------------|-----------|
| 0,70       | 2,70        | 000124      | 23,30     |



## ANCHOR BRIDGE THERMAL INSULATION COMPOSITE SYSTEM



- Set with WDVS bridge and two eye bolts
- For the anchoring of scaffolding to house walls, especially for WDVS when construction in standard version
- Even with a lever arm of 28 cm a sufficient load-bearing capacity is guaranteed in the construction in a standard version parallel to the house wall
- WDVS = Thermal insulation composite system



| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 3,61        | 009141      | 84,60     |

## EYE BOLT Ø 12 MM

EN

- Galvanized and welded
- For use with plastic expansion plugs 70/100 mm and plastic caps natural / black

| Length (m) | Thread Length (mm) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|--------------------|-------------|-----------|-------------|-----------|
| 90         | 54                 | 0,155       | 150       | 000358      | 1,50      |
| 120        | 65                 | 0,175       | 150       | 000359      | 1,70      |
| 160        | 58                 | 0,210       | 100       | 000360      | 1,90      |
| 190        | 65                 | 0,235       | 100       | 000363      | 2,10      |
| 230        | 65                 | 0,265       | 100       | 000361      | 2,20      |
| 300        | 65                 | 0,300       | 50        | 002374      | 2,50      |
| 350        | 65                 | 0,364       | 50        | 000362      | 2,70      |
| 400        | 65                 | 0,424       | 50        | 006333      | 6,00      |
| 450        | 65                 | 0,468       | 50        | 007555      | 6,20      |
| 500        | 65                 | 0,530       | 50        | 002983      | 7,50      |



## EYE BOLT M12

EN

- Galvanized and welded
- With metric thread

| Length (m) | Thread Length (mm) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|--------------------|-------------|-----------|-------------|-----------|
| 60         | 35                 | 0,140       | 150       | 012379      | 5,00      |
| 80         | 35                 | 0,150       | 150       | 012383      | 5,10      |
| 100        | 35                 | 0,160       | 100       | 012384      | 5,20      |
| 120        | 35                 | 0,175       | 100       | 012385      | 5,40      |
| 160        | 35                 | 0,210       | 100       | 012386      | 5,60      |
| 220        | 35                 | 0,260       | 50        | 012387      | 5,90      |



## PLASTIC CAP



- For closing anchor drill holes

| Colour  | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|---------|-------------|-----------|-------------|-----------|
| natural | 0,003       | 100       | 000651      | 0,20      |
| black   | 0,003       | 100       | 010353      | 0,20      |



## EXPANSION PLUG



- For eye bolts with a timber thread Ø 12 mm
- For drilling Ø 14 mm

| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,07       | 0,007       | 100       | 000357      | 0,40      |
| 0,10       | 0,007       | 100       | 011158      | 0,40      |



## MJ-SCAFFY



- Screw-in aid for eye bolts
- With socket A/F 22 (for standard ratchet wrenches)
- With 3/4 inch square socket
- With SDS drill adapter




| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 0,374       | 012600      | 70,60     |

## BRACKET WITH TUBE CONNECTOR 0.36 M



- Steel, hot dip galvanized
- With half coupler
- With tube connector
- With integrated deck retainer

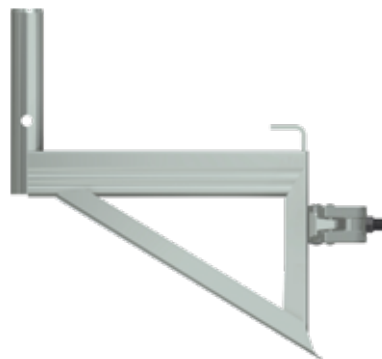

| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,36      | 3,70        | 19  | 100       | 000582      | 40,60     |
| 0,36      | 3,70        | 22  | 100       | 006945      | 40,60     |



## BRACKET WITHOUT TUBE CONNECTOR 0.36 M



- Steel, hot dip galvanized
- With half coupler
- With integrated deck retainer



| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,36      | 3,50        | 19  | 100       | 007485      | 40,60     |
| 0,36      | 3,50        | 22  | 100       | 000584      | 40,60     |



## BRACKET WITHOUT TUBE CONNECTOR 0.22 M



- Steel, hot dip galvanized
- With half coupler
- Without tube connector
- With integrated deck retainer




| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,22      | 2,50        | 19  | 200       | 006949      | 36,60     |
| 0,22      | 2,50        | 22  | 200       | 005839      | 36,60     |



## BRACKET WITHOUT TUBE CONNECTOR 0.73 M



- Steel, hot dip galvanized
- With half coupler
- Without tube connector
- With integrated lift-off protection



| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,73      | 5,90        | 19  | 20        | 000592      | 52,90     |

## BRACKET WITH TUBE CONNECTOR 0.73 M



- Steel, hot dip galvanized
- With half coupler
- With tube connector
- Assembly only with support (e. g. cross diagonal, see page 25)



| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,73      | 6,20        | 19  | 20        | 000585      | 53,80     |
| 0,73      | 6,10        | 22  | 20        | 006946      | 53,80     |



## BRACKET 0.73 M REINFORCED



- Steel, hot dip galvanized
- With half coupler
- With tube connector
- With integrated lift-off protection
- For use up to load class 3 without bracing



| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,73      | 9,30        | 19  | 20        | 009068      | 91,50     |

FRAME BRACKET 0.73 M

 ID

- Steel, hot dip galvanized
- With two half couplers
- With two tube connectors
- For scaffolding extension and for the construction of a gap-free roof guard
- For the creation of scaffold projections or for the construction of a gap-free roof guard




| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,73      | 10,00       | 19  | 20        | 000589      | 98,60     |

BRACKET 1.09 M

 ID

- Steel, hot dip galvanized
- With half coupler
- With tube connector
- Assembly only with support (e. g. cross diagonal, see page 25)

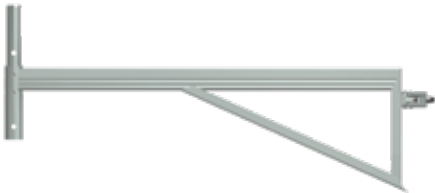

| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 1,09      | 9,00        | 19  | 20        | 000586      | 121,70    |
| 1,09      | 9,00        | 22  | 20        | 006947      | 121,70    |

🕒

YOU WILL FIND BRACKETS ASPIRATIONS ON PAGE 16


## CORNER BRACKET WITHOUT TUBE CONNECTOR



- Steel, hot dip galvanized
- With integrated deck retainer
- A welded on half coupler at a staggered height enables two brackets to be connected to one stand pipe





| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,36      | 4,70        | 19  | 100       | 008087      | 51,70     |

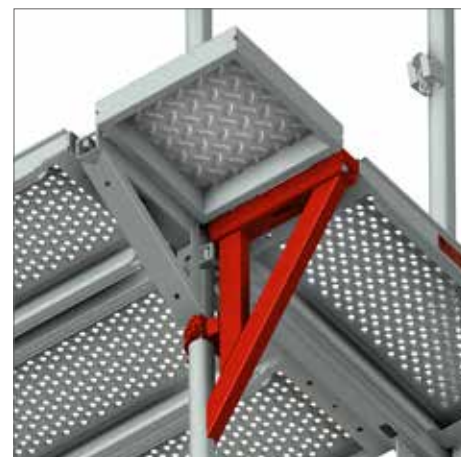

## ECKBELAG



- Steel, hot dip galvanized
- As an addition to system decks in the inner corner area
- Non-slip deck
- In conjunction with corner bracket, see above



| Length (m) | Width (m) | Weight (kg) | Article no. | Price (€) |
|------------|-----------|-------------|-------------|-----------|
| 0,36       | 0,36      | 7,00        | 008158      | 133,00    |

## SYSTEM GRID BRACKET WITH TUBE CONNECTOR 0.50 M



- Steel, hot dip galvanized
- With half coupler
- With tube connector
- Used mainly to extend or shorten scaffold fields by 0.50 m
- When used as a scaffold widening, two 0.61 m platforms can be installed without gaps (see picture)

| Width (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-----------|-------------|-----|-----------|-------------|-----------|
| 0,50      | 5,40        | 19  | 20        | 007126      | 53,10     |



## ROOF GUARD EXTENSION



- Steel tube Ø 48.3 mm, hot dip galvanized
- Use in connection with a frame bracket 0.73 m

| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,73      | 4,00        | 000518      | 40,20     |



## DECK FASTENING



- Steel, hot dip galvanized
- Suitable for roof guard extensions

| Model   | Weight (kg) | Article no. | Price (€) |
|---------|-------------|-------------|-----------|
| 2-board | 2,00        | 000590      | 52,90     |



## ALUMINUM STAIRS WITH PLATFORM



- Bay height 2.00 m
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway
- Evenly distributed area load  $p = 2.5 \text{ kN/m}^2$
- Single load distributed on  $0.2 \times 0.2 \text{ m}^2 F = 1.5 \text{ kN}$
- Meets the requirements according to DIN EN 12811-1



| Field length (m) | Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------------|------------|-----------|-------------|-----------|-------------|-----------|
| 2,57             | 3,25       | 0,64      | 23,00       | 10        | 000419      | 524,60    |
| 3,07             | 3,65       | 0,64      | 28,00       | 10        | 000420      | 639,60    |


Individual customer identification possible.



## OUTSIDE STAIRCASE HANDRAIL



- Steel, hot dip galvanized
- For aluminum platform stairs
- To hang in guard rail box

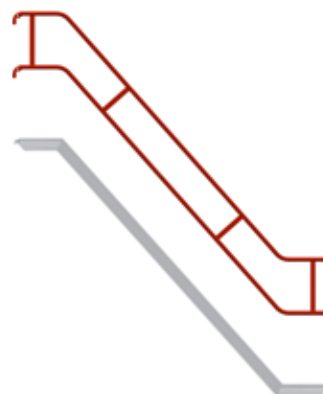

| Field (m) | Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-----------|------------|-------------|-----------|-------------|-----------|
| 2,57      | 3,25       | 16,00       | 40        | 003182      | 140,00    |
| 3,07      | 3,65       | 16,50       | 40        | 003181      | 146,80    |

## INSIDE STAIRCASE HANDRAIL



- Steel, hot dip galvanized
- For aluminum platform stairs
- Can be used for field wide 2.50 and 3.00 m
- For mounting to the stair string
- Integrated end plug on the handrail for protection




| Length (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----|-----------|-------------|-----------|
| 2,25       | 11,50       | 19  | 20        | 000425      | 137,80    |
| 2,25       | 11,50       | 22  | 20        | 006942      | 137,80    |

## ROUND INSIDE GUARD RAIL



- Steel, hot dip galvanized
- For aluminum platform stairs
- For mounting to the stair string




| Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|-------------|-----|-----------|-------------|-----------|
| 5,80        | 40  | 19        | 009226      | 69,60     |

## GAP COVER WITH HALF COUPLER



- Steel, hot dip galvanized
- Non-slip deck
- Varied use for bridging gaps up to 0.25 m wide
- Quick assembly due to half coupler

| Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,35       | 0,38      | 4,00        | 50        | 007794      | 45,80     |
| 0,60       | 0,38      | 6,20        | 50        | 008256      | 71,60     |

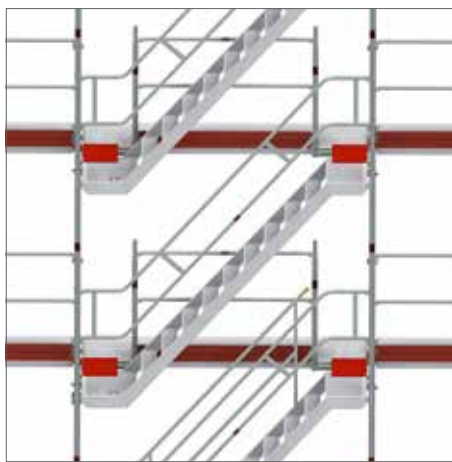


## GRIDDOOR



- Complete protection against unauthorised access to stairways
- Visible separation between construction site and surroundings
- Assembly and fixing thanks to sliding coupling connection points
- Mesh door for all scaffolding widths thanks to flexible coupling connections

| Height (m) | Width (m) | Weight (kg) | Article no. | Price (€) |
|------------|-----------|-------------|-------------|-----------|
| 1,70       | 0,85      | 13,00       | 014603      | 179,00    |

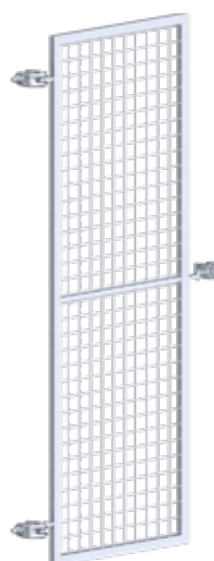


## GUARD RAIL BRACKET FOR PLATFORM STAIRS



- Steel, hot dip galvanized
- With tube connector
- With welded half coupler
- Reduces the guard rail width by 0.50 m, e. g. from 2.57 to 2.07 m to make the passage to the stairs

| Length (m) | Weight (kg) | A/F | Article no. | Price (€) |
|------------|-------------|-----|-------------|-----------|
| 0,50       | 3,20        | 19  | 008227      | 49,20     |

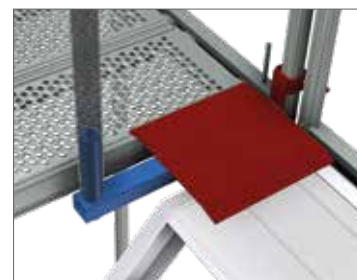

## STEP ACCESS PLATFORM BRACKET



- Steel, hot dip galvanized
- Non-slip deck
- With two tube connectors, axial dimension 175 mm
- With two welded couplers
- To set up a stairway in front of a scaffold field
- Reduces the guard rail width by 0.50 m, e.g. from 2.57 to 2.07 m to create the passage to the stairs

| A/F | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-----|-------------|-----------|-------------|-----------|
| 22  | 7,50        | 14        | 000234      | 91,80     |



## ALUMINUM BEGINNING STAIRS WITH PLATFORM



- Beginning stair with integrated base jack mounts
- Scaffold stairway for the planned construction with facade scaffolding
- For quick and safe mounting of the scaffold levels
- Non-slip and slip resistant steps allow comfortable ascent

| Height (m) | Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|------------|-----------|-------------|-----------|-------------|-----------|
| 0,50       | 0,91       | 0,64      | 9,94        | 10        | 012040      | 326,10    |
| 1,00       | 1,49       | 0,64      | 11,60       | 10        | 006521      | 340,70    |
| 1,50       | 1,75       | 0,64      | 18,56       | 15        | 009945      | 487,40    |



## STAIR GUARD RAIL



- Steel, hot dip galvanized
- For aluminum beginning stairs with platform 1.00 m

| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 11,50       | 014964      | 135,70    |



## ACCESS LADDER 1.00 M



- Steel, hot dip galvanized
- System-related suspension
- Enables easy entry into the scaffold, with a field height of 1.00 m

| Length (m) | Width (m) | Weight (kg) | Article no. | Price (€) |   |
|------------|-----------|-------------|-------------|-----------|---|
| 1,00       | 0,62/0,47 | 7,90        | 010407      | 93,80     | 🕒 |



## LEDGER



- Steel, hot dip galvanized
- U-profile with welded half couplers
- For mounting decks in any intermediate levels

| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,73      | 3,60        | 000594      | 55,20     |
| 1,09      | 6,50        | 000593      | 61,50     |



## DECK TRANSOM



- Steel, hot dip galvanized
- For installation between two assembly frames to create a continuous deck area

| Width (m) | Weight (kg) | Article no. | Price (€) |   |
|-----------|-------------|-------------|-----------|---|
| 0,73      | 4,70        | 004072      | 67,30     | 🕒 |
| 1,09      | 6,40        | 002556      | 74,30     | 🕒 |



## DECK FASTENING



- Steel, hot dip galvanized
- For brackets

| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,32      | 1,00        | 000580      | 14,80     |
| 0,50      | 1,20        | 007745      | 16,20     |
| 0,73      | 1,50        | 000581      | 18,30     |
| 1,09      | 2,00        | 000579      | 23,20     |





## DECK FASTENING WITH HALF COUPLER



- Steel, hot dip galvanized
- With welded half coupler
- For securing decks against lifting off

| Weight (kg) | A/F | Article no. | Price (€) |
|-------------|-----|-------------|-----------|
| 1,10        | 19  | 008156      | 15,80     |
| 1,15        | 22  | 008157      | 15,80     |

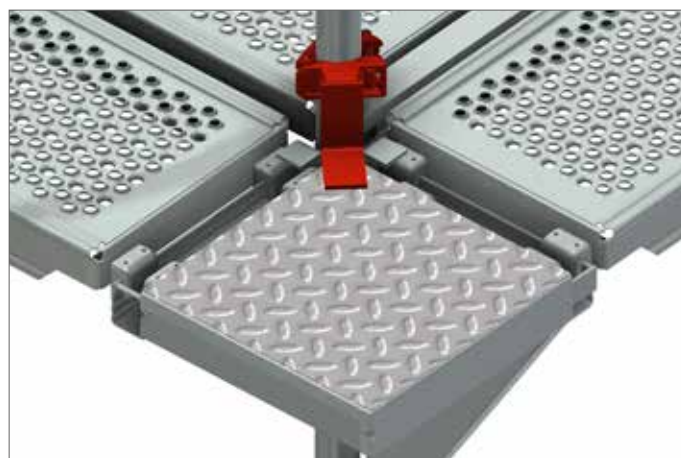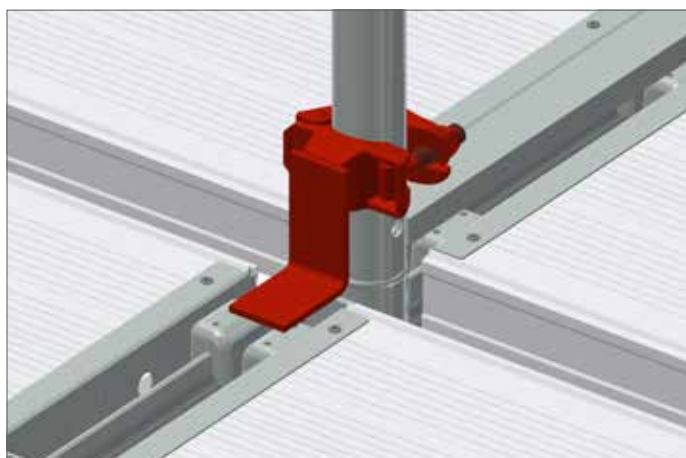

## DECK FASTENING WITH WEDGE



- Steel, hot dip galvanized
- With wedge head connection
- For securing decks against lifting off



| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 0,70        | 006850      | 14,60     |


## DECK FASTENING



- Steel, hot dip galvanized
- For preventing decks from lifting off



| Width (m) | Weight (kg) | A/F | Article no. | Price (€) |
|-----------|-------------|-----|-------------|-----------|
| 0,40      | 1,50        | 22  | 007302      | 26,60     |

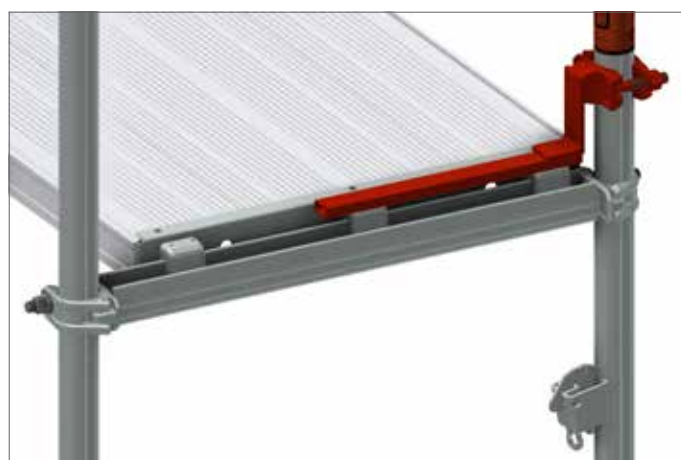


## GAP COVER



- Steel, hot dip galvanized
- Non-slip deck
- Used to cover gaps in corner scaffolding
- System-related suspension

| Model   | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|---------|-----------|-------------|-----------|-------------|-----------|
| 1-board | 0,32      | 5,00        | 50        | 009503      | 58,60     |
| 2-board | 0,63      | 9,20        | 50        | 008374      | 83,20     |

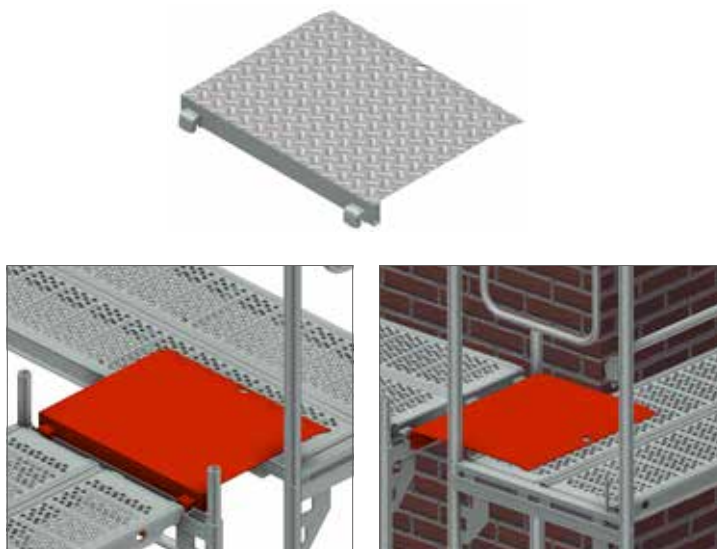

## POLYGON COVERAGE



- Steel, hot dip galvanized
- Non-slip deck with deck fastening for gap-free construction of round scaffolding from 0 to 45°
- System-related suspension

| Model   | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|---------|-----------|-------------|-----------|-------------|-----------|
| 2-board | 0,61      | 8,50        | 50        | 007731      | 70,30     |
| 3-board | 0,94      | 20,50       | 50        | 014230      | 226,40    |



**FURTHER GAP COVERS CAN BE FOUND  
IN OUR PRICE LIST „ACCESSORIES“.**



END GUARD RAIL 1-BOARD



- Steel tube, hot dip galvanized
- For double side protection at the ends
- Plugged into each other
- Can be used for side protection on round scaffoldings



| Weight (kg) | PU (pcs.) | A/F | Article no. | Price (€) |
|-------------|-----------|-----|-------------|-----------|
| 2,60        | 19        | 50  | 009366      | 29,20     |

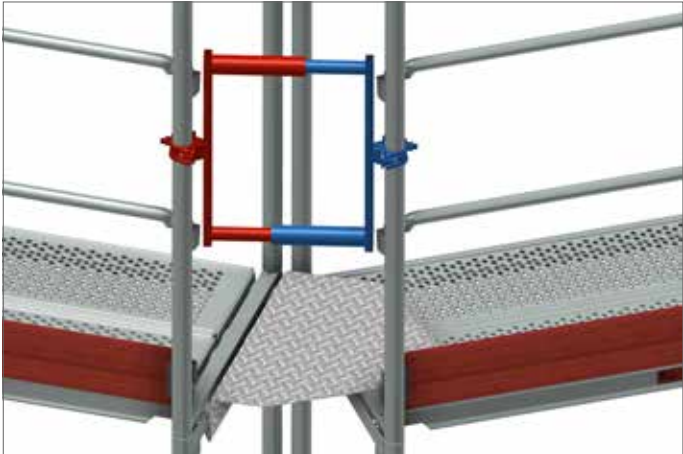
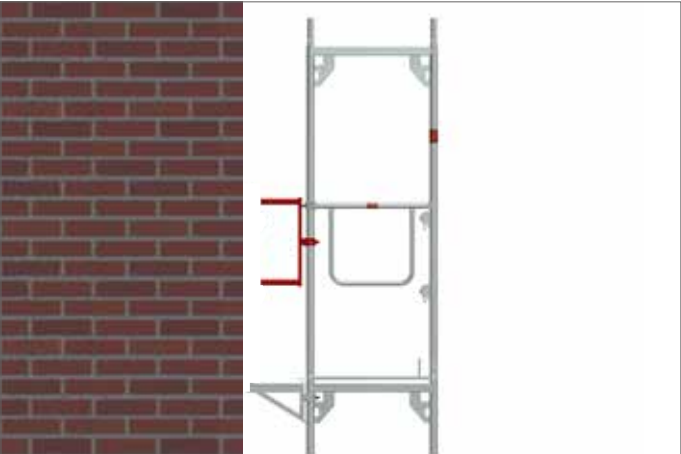


## ROOFER BRACKET



- Steel, hot dip galvanized
- With two Tube connectors
- Meets different requirements for ergonomic workplaces for painters and tinsmiths
- For use up to load class 3

| Width (m) | Weight (kg) | A/F | VPE | Article no. | Price (€) |
|-----------|-------------|-----|-----|-------------|-----------|
| 0,73      | 15,60       | 19  | 12  | 000275      | 150,30    |

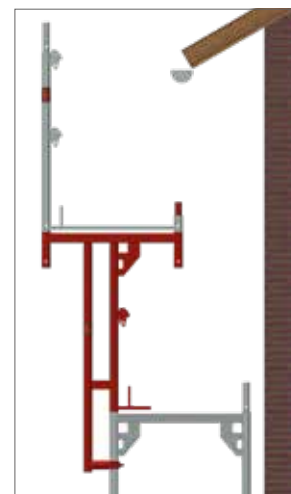
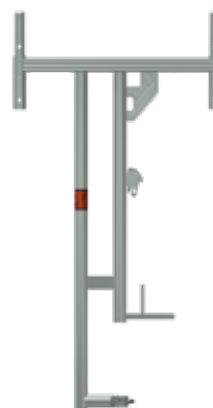


## CONSOL FRAME



- Steel, hot dip galvanized
- With two tube connectors
- For use at the eaves

| Height (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 1,00       | 0,73      | 14,60       | 20        | 010918      | 133,40    |

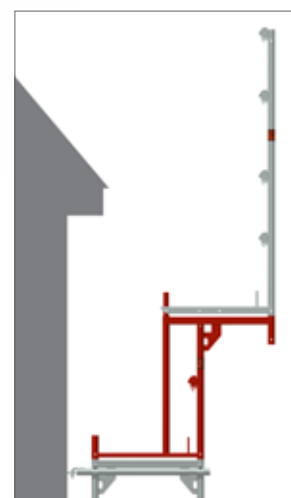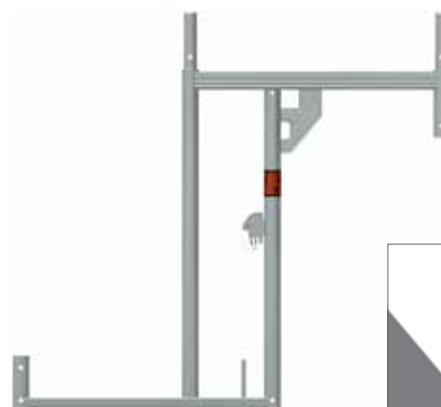

## RAIN CANOPY BRACKET TWO-PIECE SET



- Steel, hot dip galvanized
- For use with frame width 0.73 m in the top scaffold platform
- In conjunction with guard rails and tarps serves this component provides weather protection




| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,73      | 13,50       | 008130      | 184,50    |



## GUARD RAILS



- Steel tube Ø 38 mm, hot dip galvanized
- Compressed to the end and punched
- Time-saving attachment via the self-locking swivel pins
- No tools required for assembly




| Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----------|-------------|-----------|
| 0,73       | 1,40        | 100       | 011958      | 18,20     |
| 1,09       | 2,00        | 100       | 011959      | 18,80     |
| 1,57       | 2,90        | 100       | 011963      | 20,00     |
| 2,07       | 3,80        | 100       | 011964      | 20,50     |
| 2,57       | 4,70        | 100       | 011965      | 21,90     |
| 3,07       | 5,50        | 100       | 011966      | 23,30     |

## ROLLING TOWER 2.00 M



- Steel, rectangular tube, hot dip galvanized
- With two tube connectors
- All requirements of DIN 4420-3 must be met for mobile scaffolding with a steel beam. This applies particularly to sufficient ballast, safe inside climbing via access decks with ladders and the necessary side guards at each soil level.

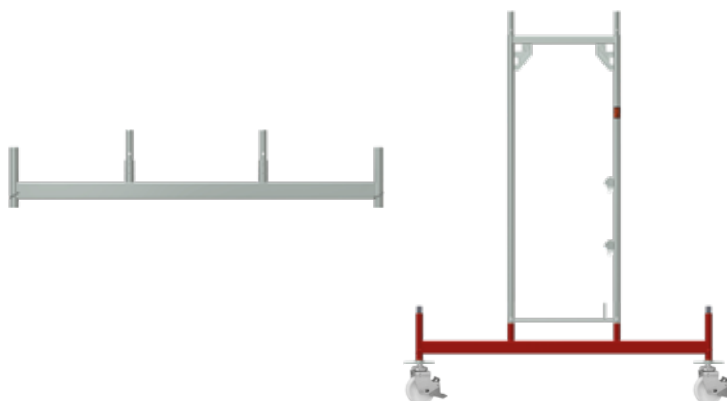


| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 2,00      | 21,00       | 000599      | 134,50    |

## ROLLING TOWER 3.00 M



- Steel, rectangular tube, hot dip galvanized
- With four tube connectors
- To create mobile scaffolds
- Deck transom (see page 37)

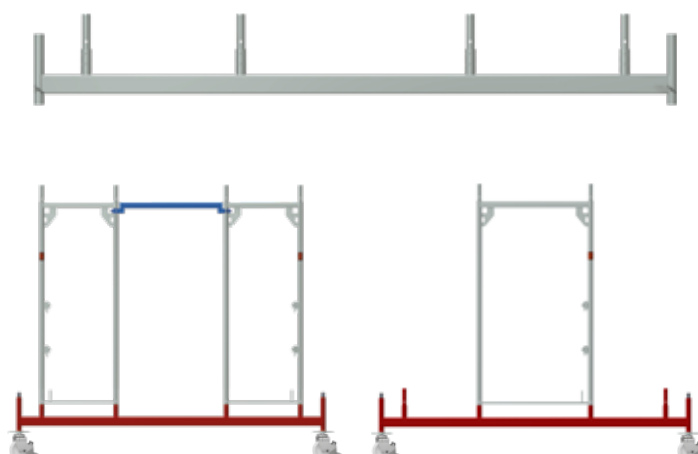


| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 3,00      | 32,00       | 000598      | 235,70    |

## SPINDLE SECURITY



- Steel, hot dip galvanized
- With half coupler
- Secures base jacks and swivel castors with spindle when moving scaffolding units with a crane

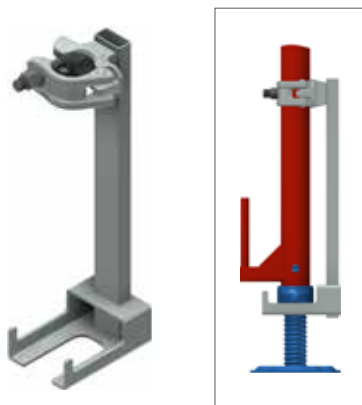

| Height (m) | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|------------|-------------|-----|-----------|-------------|-----------|
| 0,40       | 2,00        | 19  | 200       | 010294      | 30,20     |

## CASTOR WITH SPINDLE



- Bearing 10 kN with central load distribution
- Castor Ø 200 mm made of polyamide with run stop
- Levelling through adjustable steel spindle
- The DIN 4420-3 applies when a rolling towers made of a scaffolding
- A standard proof of stability is required for this mobile scaffold



| Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-------------|-----------|-------------|-----------|
| 7,00        | 80        | 000332      | 102,50    |

## HEAD JACK

- Steel, hot dip galvanized
- Supporting element for support and platform scaffolding as well as for formwork scaffolds
- Used to hold squares timbers, laminated beams and formwork beams



| Opening dimension (mm) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------------------|-------------|-----------|-------------|-----------|
| 148                    | 5,60        | 200       | 000693      | 40,60     |
| 180                    | 8,30        | -         | 011537      | 49,90     |

## SECURITY PIN



- Steel, hot dip galvanized
- Ø 9 mm
- For securing the scaffold joints against unintentional lift-off




| Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-------------|-----------|-------------|-----------|
| 0,15        | 100       | 000508      | 1,40      |

## ADJUSTMENT TUBE



- Steel, hot dip galvanized
- Adjustment range 10 x 0.10 m = 1.00 m
- For levelling unequal ground
- Use in connection with a decking transom and base jack

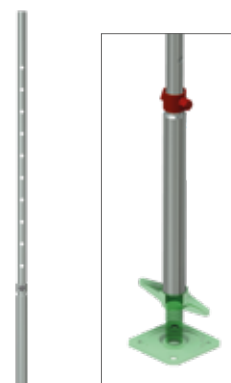

| Height (m) | Weight (kg) | Article no. | Price (€) |
|------------|-------------|-------------|-----------|
| 1,70       | 5,80        | 000402      | 56,70     |

## STANDARD COUPLER

EN

- Steel, hot dip galvanized, drop-forged
- Robust model
- For right-angled connection of tubes of Ø 48.3 mm
- Class BB, EN 74-1
- To be used in the classes B and BB of the steel and aluminum tube

| Thread   | A/F | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|----------|-----|-------------|-----------|-------------|-----------|
| Standard | 22  | 1,15        | 25        | 000325      | 8,60      |
| Standard | 19  | 1,15        | 25        | 000326      | 8,60      |
| Quick    | 22  | 1,15        | 25        | 007521      | 9,30      |
| Quick    | 19  | 1,15        | 25        | 007523      | 9,30      |



## SWIVEL COUPLER

EN

- Steel, hot dip galvanized, drop-forged
- Robust model
- For any angular connection of tubes of Ø 48.3 mm
- Class B, EN 74-1
- To be used in the class B of the steel and aluminum tube

| Thread   | A/F | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|----------|-----|-------------|-----------|-------------|-----------|
| Standard | 22  | 1,35        | 25        | 000328      | 9,30      |
| Standard | 19  | 1,35        | 25        | 000329      | 9,30      |
| Quick    | 22  | 1,35        | 25        | 007522      | 9,90      |
| Quick    | 19  | 1,35        | 25        | 007524      | 9,90      |




## SPARE PARTS CAN BE FOUND IN OUR PRICE LIST „ACCESSORIES“.

## SCAFFOLD TUBE STEEL

EN

- S235 Steel, hot dip galvanized
- Measurements as per EN 39
- Manufacturing length 6.00 m
- Minimum yield strength 235 N/mm<sup>2</sup>
- Connection of standard couplers allowed
- Special lengths on request

| Model (mm) | Length (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|------------|-------------|-----------|-------------|-----------|
| 48,3 x 3,2 | 1,00       | 3,77        | 61        | 004548      | 17,20     |
| 48,3 x 3,2 | 2,00       | 7,54        | 61        | 004550      | 31,40     |
| 48,3 x 3,2 | 3,00       | 11,31       | 61        | 004552      | 45,60     |
| 48,3 x 3,2 | 4,00       | 15,08       | 61        | 004554      | 61,80     |
| 48,3 x 3,2 | 5,00       | 18,85       | 61        | 005619      | 76,00     |
| 48,3 x 3,2 | 6,00       | 22,60       | 61        | 004087      | 85,00     |



## GUARD RAIL COUPLER

EN

- Steel, hot dip galvanized
- With half coupler
- For attaching additional guard rails, e. g. on the inside of the scaffold



| Thread   | Weight (kg) | A/F | PU (pcs.) | Article no. | Price (€) |
|----------|-------------|-----|-----------|-------------|-----------|
| Standard | 1,20        | 22  | 25        | 002464      | 20,60     |
| Standard | 1,20        | 19  | 25        | 000591      | 20,60     |

## GUARD RAIL COUPLER WITH WEDGE


- Steel, hot dip galvanized
- With half coupler
- Quick assembly due to wedge lock



| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 1,30        | 003550      | 21,30     |

## DISTANCE COUPLER

- Steel tube Ø 48.3 mm
- With two welded couplers, galvanized
- E. g. as connection between facade scaffold and a forward-placed stair ascent




| Axle dimension (m) | A/F | Weight (kg) | Article no. | Price (€) |
|--------------------|-----|-------------|-------------|-----------|
| 0,110              | 22  | 1,60        | 008225      | 26,00     |
| 0,154              | 19  | 1,80        | 008297      | 26,30     |
| 0,180              | 22  | 2,00        | 000233      | 27,10     |

## LATTICE BEAM STEEL



- Steel tube Ø 48.3 mm, hot dip galvanized
- Load depends on span according to the separate load table

| Length (m) | Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|------------|-------------|-----------|-------------|-----------|
| 3,20       | 0,40       | 30,00       | 25        | 000108      | 198,50    |
| 4,20       | 0,40       | 39,00       | 25        | 000109      | 245,80    |
| 5,20       | 0,40       | 50,00       | 25        | 000110      | 297,80    |
| 6,20       | 0,40       | 58,00       | 25        | 000111      | 335,40    |
| 7,60       | 0,40       | 72,00       | 25        | 000112      | 496,30    |

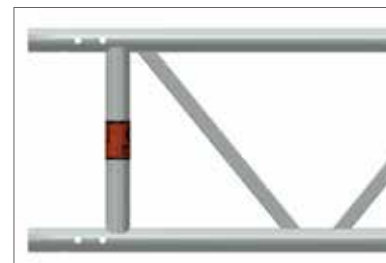

## LATTICE BEAM ALUMINUM



- Aluminum tube Ø 48.3 mm
- Load depends on span according to the separate load table

| Length (m) | Height (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|------------|-------------|-----------|-------------|-----------|
| 3,20       | 0,40       | 12,00       | 25        | 000255      | 234,00    |
| 4,20       | 0,40       | 15,00       | 25        | 000257      | 291,00    |
| 5,20       | 0,40       | 20,00       | 25        | 000258      | 348,00    |
| 6,20       | 0,40       | 23,00       | 25        | 000259      | 390,10    |
| 8,10       | 0,40       | 31,00       | 25        | 000261      | 550,00    |



## TUBE CONNECTOR FOR LATTICE BEAMS



- Steel, hot dip galvanized
- For the continuous extensions of lattice beams

| Model    | Weight (kg) | Article no. | Price (€) |
|----------|-------------|-------------|-----------|
| Straight | 1,30        | 003588      | 30,50     |



## BOLT WITH CUTTER PIN



- Screw-free connection of lattice beams
- Replaces usual screws M 12 x 60 mm there by reducing the assembly time
- Consisting of cotter pin (article no. 002232), bolt (article no. 002235) and washer (article no. 002964)
- All articles are also available separately

| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 0,09        | 002237      | 3,70      |



## DECK LEDGER FOR LATTICE BEAMS



- Steel, hot dip galvanized
- With two tube connectors
- For use with bridging with lattice beams

| Width (m) | Weight (kg) | Article no. | Price (€) |
|-----------|-------------|-------------|-----------|
| 0,73      | 5,50        | 008161      | 80,60     |
| 1,09      | 9,10        | 010158      | 96,10     |




## WALL CONNECTION FOR LATTICE BEAM



- Steel, hot dip galvanized
- For fastening to the wall, e. g. for bridging constructions
- For lattice beams with 400 mm construction height

| Weight (kg) | Article no. | Price (€) |
|-------------|-------------|-----------|
| 3,50        | 000170      | 78,00     |

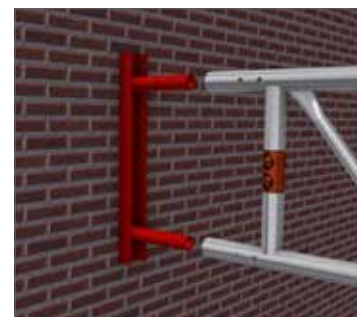

STACKING PALLET FOR TUBES



- Steel tube, hot-dip galvanized
- Specially suited for module scaffolds, e.g. tubes and toe boards
- Open all round
- Suited for stacked and crane transports
- The tube supports are removable and are to be stowed securely in the base frame so that empty pallets can be transported and stacked
- Special designs on request
- Push-on tube with bevel on one side, also available separately (Article no. 005791)

| Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------|-----------|-------------|-----------|-------------|-----------|
| 0,85       | 0,85      | 30,50       | 5         | 006962      | 232,20    |
| 1,25       | 0,55      | 31,80       | 5         | 010334      | 231,90    |
| 1,25       | 0,85      | 35,00       | 5         | 005614      | 240,20    |




SCAFFOLD PALLET FOR ASSEMBLY FRAME



- Steel tube, hot dip galvanized
- Continuous fork mount for safe fork-lift transport
- Additional cut-outs allow side retracting
- Capacity: 20 Assembly frames

| System | Length (m) | Width (m) | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|--------|------------|-----------|-------------|-----------|-------------|-----------|
| UC 70  | 1,11       | 0,79      | 31,10       | 5         | 008317      | 301,90    |
| UC 100 | 1,11       | 1,16      | 38,70       | 5         | 008367      | 328,10    |

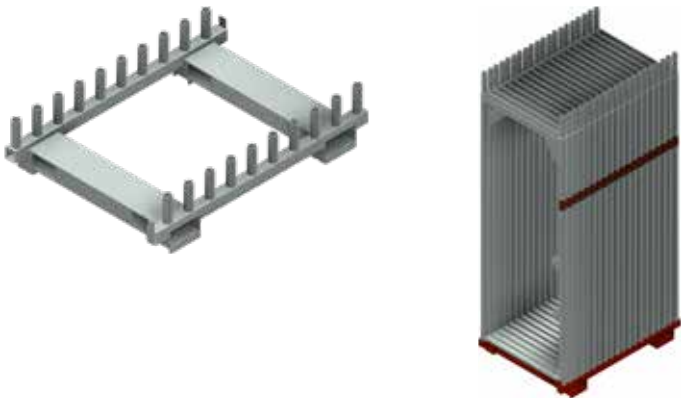

OTHER PRODUCTS FOR STORAGE AND TRANSPORT FIND IN OUR PRICE LIST ‘ACCESSORIES’



## ASSEMBLY SECURITY GUARD RAIL

The assembly security guard rail (MSG) serves as a security measure on the top scaffold and in the ascent field. The system consisting of guard rail posts and extendable guard rail spar is mounted in the construction of the scaffold before entering the top scaffold position of the underlying layer.

- Approved by the German Institute for Building Supervision DIBt under the number: Z-8.22-1002.



## POST FOR ASSEMBLY SECURITY GUARD RAIL



- Coaxially arranged aluminum tubes with two swivel pin connections
- Fits any scaffold tube  $\varnothing 48.3$  mm
- Maximum flexibility in the application
- Tool-free fixation through anti-rotation device
- Operation (locking and unlocking) from above and below
- At the same time assembly and disassembly of guard rail and intermediate beam

| Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-------------|-----------|-------------|-----------|
| 5,80        | 45        | 011088      | 251,50    |



## GUARD RAIL FOR ASSEMBLY SECURITY GUARD RAIL



- Aluminum tube
- Two-sided recesses for attachment to the guard rail post
- Locking pin prevents the unintentional sliding apart of the tubes during transport
- Piston guide belts for smooth sliding of the aluminum tubes



| For field length | Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|------------------|-------------|-----------|-------------|-----------|
| 1,50 - 1,57 m    | 3,40        | 10        | 011437      | 133,40    |
| 2,00 - 3,07 m    | 4,60        | 10        | 011156      | 143,90    |



## FRONT ASSEMBLY SECURITY GUARD RAIL



- Ergonomic, easy to handle and economical to install
- One-piece component as system-free design, no moving parts
- Tool-free installation
- Integrated deadlock
- For easy installation, users stand on the covered position
- Comfortable implementation from below and above

| Weight (kg) | PU (pcs.) | Article no. | Price (€) |
|-------------|-----------|-------------|-----------|
| 7,10        | 10        | 011131      | 282,80    |



SET - PERSONAL PROTECTIVE EQUIPMENT MILLER 1

EN N



- Revolution R2 Comfort harness – with 80 cm back eyelet extension (EN 361), elastic dura flex belt band, sharp edge tested, front and rear eyelet, comfort back pads, automatic fasteners for quick on and off, belt end clips, swivel connection at waist height for optimal ergonomics when bending or stretching, attachment point for tools and accessories, integrated label tray
- Lifetime of the material is 10 years
- Lanyards with shock absorber - length 2.00 m, sharp edges tested, horizontally approved (attachment point on foot level), 63 mm scaffold hook, stretchy design for more latitude of movement, safety clip for fastening to harness, Teflon-coated for longer life, EN 354 and EN 355
- Equipment bag - 0.27 x 0.80 m (D x H), made of PVC, red



| Size   | Article no. | Price (€) |
|--------|-------------|-----------|
| S - M  | 006273      | 280,00    |
| L - XL | 005610      | 280,00    |

SET - PERSONAL PROTECTIVE EQUIPMENT MILLER 2

EN N



- Revolution R2 Comfort harness – with 80 cm back eyelet extension (EN 361), elastic dura flex belt band, sharp edge tested, front and rear eyelet, comfort back pads, automatic fasteners for quick on and off, belt end clips, swivel connection at waist height for optimal ergonomics when bending or stretching, attachment point for tools and accessories, integrated label tray
- Twin Manyard EDGE 2.00 m - with 2 x 63 mm aluminum hooks (EN 354 + 355), sharp edges tested, integrated shock absorber with fall of indicator
- Lifetime of the material is 10 years
- Equipment bag - 0.27 x 0.80 m (D x H), made of PVC, red



| Size   | Article no. | Price (€) |
|--------|-------------|-----------|
| L - XL | 011284      | 410,00    |

ALL SET COMPONENTS MAY ALSO BE ORDERED SEPARATELY

## KASK INDUSTRIAL CLIMBING HELMET SUPERPLASMA A0

EN ID N

- Tested and approved according to EN 397
- With chin strap
- Adjusting wheels allow one quick and easy adjustment to the right size
- With ring for attaching the helmet to a belt

| Color      | Article no. | Price (€) |
|------------|-------------|-----------|
| dark blue  | 010496      | 74,60     |
| white      | 010497      | 74,60     |
| yellow     | 010498      | 74,60     |
| orange     | 010499      | 74,60     |
| red        | 010500      | 74,60     |
| green      | 010501      | 74,60     |
| dark green | 010502      | 74,60     |
| light blue | 010503      | 74,60     |
| black      | 010453      | 74,60     |



## KASK INDUSTRIAL CLIMBING HELMET ZENITH

EN ID N

- Tested and approved according to EN 397 and EN 50365
- Various settings allow a quick and easy adjust
- With ring for attaching the helmet to a belt

| Color  | Article no. | Price (€) |
|--------|-------------|-----------|
| blue   | 010504      | 84,70     |
| white  | 010505      | 84,70     |
| yellow | 010506      | 84,70     |
| orange | 010507      | 84,70     |
| red    | 010508      | 84,70     |
| green  | 010509      | 84,70     |
| black  | 010510      | 84,70     |



**OTHER PROTECTIVE EQUIPMENT FIND IN OUR PRICELIST 'ACCESSORIES'**

| SCAFFOLD BAY LENGTH 3.07 X 0.73 M |               |             |           | Length x Height (m)  |                    |                  |
|-----------------------------------|---------------|-------------|-----------|----------------------|--------------------|------------------|
|                                   |               |             |           | 100.00 x 10.20       | 50.00 x 10.20      | 10.00 x 10.20    |
|                                   |               |             |           | 1,002 m² - 32 Fields | 501 m² - 16 Fields | 94 m² - 3 Fields |
| Product description               | Dimension (m) | Article no. | Price (€) | Pieces               | Pieces             | Pieces           |

| BASE EQUIPMENT              |             |        |        |           |           |          |
|-----------------------------|-------------|--------|--------|-----------|-----------|----------|
| Assembly frame steel 70     | 2.00 x 0.73 | 000853 | 88,80  | 132       | 68        | 16       |
| Steel deck OPTI-LINE 0.32 m | 3.07 x 0.32 | 008775 | 102,60 | 250       | 122       | 18       |
| Access deck plywood panel   | 3.07 x 0.61 | 000494 | 409,50 | 4         | 4         | 4        |
| Diagonale                   | 3.07        | 000553 | 45,60  | 28        | 16        | 4        |
| Start ledger                | 0.73        | 000595 | 40,00  | 2         | 2         | 2        |
| Back guard rail             | 3.07        | 000504 | 24,60  | 256       | 128       | 24       |
| Toe board                   | 3.07        | 000542 | 25,10  | 128       | 64        | 12       |
| End toe board               | 0.73        | 000544 | 15,00  | 8         | 8         | 8        |
| Double end guard rail       | 0.73        | 000530 | 40,00  | 6         | 6         | 6        |
| Guard rail post             | 1.00 x 0.73 | 000867 | 51,10  | 31        | 15        | 2        |
| Top end guard rail post     | 1.00 x 0.73 | 000865 | 91,60  | 2         | 2         | 2        |
| Base jack                   | 0.60        | 000320 | 22,00  | 66        | 34        | 8        |
| Horizontal brace            | 3.07        | 000551 | 90,70  | 6         | 3         | 0        |
| Wall tie                    | 0.60        | 000241 | 16,40  | 35        | 19        | 6        |
| Standard coupler            | A/F 19      | 000326 | 8,60   | 35        | 19        | 6        |
| Expansion plug              | 0.07        | 000357 | 0,40   | 35        | 19        | 6        |
| Eye bolt                    | 0.12        | 000359 | 1,70   | 35        | 19        | 6        |
| Toatal price in €           |             |        |        | 54.948,80 | 28.603,10 | 7.043,60 |

| EXTRA CHARGE IN EXCHANGE      |                                     |             |                | 1,002 m² - 32 Fields |                  | 501 m² - 16 Fields |                  | 94 m² - 3 Fields |                  |
|-------------------------------|-------------------------------------|-------------|----------------|----------------------|------------------|--------------------|------------------|------------------|------------------|
| FROM                          | AGAINST                             | Article no. | List price (€) | Pieces               | Extra charge (€) | Pieces             | Extra charge (€) | Pieces           | Extra charge (€) |
| Access deck with plywood deck | Access deck with aluminum deck      | 000488      | 411,50         | 4                    | 254,00           | 4                  | 254,00           | 4                | 254,00           |
| Steel deck OPTI-LINE 0.32 m   | Combi acces deck with plywood panel | 000484      | 226,00         | 125                  | 2.600,00         | 61                 | 1.268,80         | 9                | 187,20           |
| Steel deck OPTI-LINE 0.32 m   | Aluminum deck with steel caps       | 006634      | 284,50         | 125                  | 9.912,50         | 61                 | 4.837,30         | 9                | 713,70           |
| Assembly frame steel 70       | Assembly frame aluminum 70          | 000863      | 136,30         | 132                  | 6.270,00         | 68                 | 3.230,00         | 16               | 760,00           |
| Access decks                  | Platform stair tower*               | -           | -              | 1                    | 2.783,80         | 1                  | 2.783,80         | 1                | 2.783,80         |

\*The scaffold components required for the platform stair tower are sumarized in a price and offset against the access decks.

| SCAFFOLD BAY LENGTH 2.57 X 0.73 M |               |             |           | Length x Height (m)  |                    |                   |
|-----------------------------------|---------------|-------------|-----------|----------------------|--------------------|-------------------|
|                                   |               |             |           | 100.00 x 10.20       | 50.00 x 10.20      | 10.00 x 10.20     |
|                                   |               |             |           | 1,049 m² - 40 Fields | 525 m² - 20 Fields | 105 m² - 4 Fields |
| Product description               | Dimension (m) | Article no. | Price (€) | Pieces               | Pieces             | Pieces            |

| BASE EQUIPMENT              |             |        |        |           |           |          |
|-----------------------------|-------------|--------|--------|-----------|-----------|----------|
| Assembly frame steel 70     | 2,00 x 0,73 | 000853 | 88,80  | 164       | 84        | 20       |
| Steel deck OPTI-LINE 0.32 m | 2,57 x 0,32 | 008774 | 90,30  | 314       | 154       | 26       |
| Access deck plywood panel   | 2,57 x 0,61 | 000492 | 359,10 | 4         | 4         | 4        |
| Diagonale                   | 2,57        | 000552 | 42,80  | 32        | 16        | 4        |
| Start ledger                | 0,73        | 000595 | 40,00  | 2         | 2         | 2        |
| Back guard rail             | 2,57        | 000503 | 23,10  | 320       | 160       | 32       |
| Toe board                   | 2,57        | 000541 | 23,10  | 160       | 80        | 16       |
| End toe board               | 0,73        | 000544 | 15,00  | 8         | 8         | 8        |
| Double end guard rail       | 0,73        | 000530 | 40,00  | 6         | 6         | 6        |
| Guard rail post             | 1,00 x 0,73 | 000867 | 51,10  | 39        | 19        | 3        |
| Top end guard rail post     | 1,00 x 0,73 | 000865 | 91,60  | 2         | 2         | 2        |
| Base jack                   | 0,60        | 000320 | 22,00  | 82        | 42        | 10       |
| Horizontal brace            | 2,57        | 000550 | 77,00  | 7         | 3         | 0        |
| Wall tie                    | 0,60        | 000241 | 16,40  | 43        | 23        | 7        |
| Standard coupler            | SW 19       | 000326 | 8,60   | 43        | 23        | 7        |
| Expansion plug              | 0,07        | 000357 | 0,40   | 43        | 23        | 7        |
| Eye bolt                    | 0,12        | 000359 | 1,70   | 43        | 23        | 7        |
| Total price in €            |             |        |        | 62.935,80 | 32.403,00 | 8.026,40 |

| EXTRA CHARGE IN EXCHANGE      |                                     |             |                | 1,049 m² - 40 Fields |                  | 525 m² - 20 Fields |                  | 105 m² - 4 Fields |                  |
|-------------------------------|-------------------------------------|-------------|----------------|----------------------|------------------|--------------------|------------------|-------------------|------------------|
| FROM                          | AGAINST                             | Article no. | List price (€) | Pieces               | Extra charge (€) | Pieces             | Extra charge (€) | Pieces            | Extra charge (€) |
| Access deck with plywood deck | Access deck with aluminum deck      | 000486      | 368,70         | 4                    | 258,80           | 4                  | 258,80           | 4                 | 258,80           |
| Steel deck OPTI-LINE 0.32 m   | Combi acces deck with plywood panel | 000483      | 191,10         | 157                  | 1.648,50         | 77                 | 808,50           | 13                | 136,50           |
| Steel deck OPTI-LINE 0.32 m   | Aluminum deck with steel caps       | 006633      | 250,40         | 157                  | 10.958,60        | 77                 | 5.374,60         | 13                | 907,40           |
| Assembly frame steel 70       | Assembly frame aluminum 70          | 000863      | 136,30         | 164                  | 7.790,00         | 84                 | 3.990,00         | 20                | 950,00           |
| Access decks                  | Platform stair tower*               | -           | -              | 1                    | 2.557,90         | 1                  | 2.557,90         | 1                 | 2.557,90         |

\*The scaffold components required for the platform stair tower are summarized in a price and offset against the access decks.

| SCAFFOLD BAY LENGTH 2.57 X 1.09 M |               |             |           | Length x Height (m)  |                    |                   |
|-----------------------------------|---------------|-------------|-----------|----------------------|--------------------|-------------------|
|                                   |               |             |           | 100.00 x 10.20       | 50.00 x 10.20      | 10.00 x 10.20     |
|                                   |               |             |           | 1,049 m² - 40 Fields | 525 m² - 20 Fields | 105 m² - 4 Fields |
| Product description               | Dimension (m) | Article no. | Price (€) | Pieces               | Pieces             | Pieces            |

| BASE EQUIPMENT              |             |        |        |           |           |           |
|-----------------------------|-------------|--------|--------|-----------|-----------|-----------|
| Assembly frame steel 100    | 2.00 x 1.09 | 000858 | 111,80 | 164       | 84        | 20        |
| Steel deck OPTI-LINE 0.32 m | 2.57 x 0.32 | 008774 | 90,30  | 475       | 235       | 43        |
| Access deck plywood panel   | 2.57 x 0.61 | 000492 | 359,10 | 4         | 4         | 4         |
| Diagonale                   | 2.57        | 000552 | 42,80  | 32        | 16        | 4         |
| Start ledger                | 1.09        | 009148 | 49,20  | 2         | 2         | 2         |
| Back guard rail             | 2.57        | 000503 | 23,10  | 320       | 160       | 32        |
| Toe board                   | 2.57        | 000541 | 23,10  | 160       | 80        | 16        |
| End toe board               | 1.09        | 000545 | 17,20  | 8         | 8         | 8         |
| Double end guard rail       | 1.09        | 000531 | 45,40  | 6         | 6         | 6         |
| Guard rail post             | 1.00 x 1.09 | 000869 | 53,40  | 39        | 19        | 3         |
| Top end guard rail post     | 1.00 x 1.09 | 000556 | 103,00 | 2         | 2         | 2         |
| Base jack                   | 0.60        | 000320 | 22,00  | 82        | 42        | 10        |
| Horizontal brace            | 2.57        | 000550 | 77,00  | 7         | 3         | 0         |
| Wall tie                    | 0.60        | 000241 | 16,40  | 43        | 23        | 7         |
| Standard coupler            | A/F 19      | 000326 | 8,60   | 43        | 23        | 7         |
| Expansion plug              | 0.07        | 000357 | 0,40   | 43        | 23        | 7         |
| Eye bolt                    | 0.12        | 000359 | 1,70   | 43        | 23        | 7         |
| Toatal price in €           |             |        |        | 81.427,00 | 41.784,20 | 10.119,60 |

| EXTRA CHARGE IN EXCHANGE      |                                |             |                | 1.049 m² - 40 Fields |                  | 525 m² - 20 Fields |                  | 105 m² - 4 Fields |                  |
|-------------------------------|--------------------------------|-------------|----------------|----------------------|------------------|--------------------|------------------|-------------------|------------------|
| FROM                          | AGAINST                        | Article no. | List price (€) | Pieces               | Extra charge (€) | Pieces             | Extra charge (€) | Pieces            | Extra charge (€) |
| Access deck with plywood deck | Access deck with aluminum deck | 000486      | 368,70         | 4                    | 258,80           | 4                  | 258,80           | 4                 | 220,00           |
| Steel deck OPTI-LINE 0.32 m   | Aluminum deck with steel caps  | 006633      | 250,40         | 157                  | 10.958,60        | 77                 | 5.374,60         | 13                | 813,80           |
| Access decks                  | Platform stair tower*          | -           | -              | 1                    | 2.557,90         | 1                  | 2.557,90         | 1                 | 2.557,90         |

\*The scaffold components required for the platform stair tower are summarized in a price and offset against the access decks.





SIMPLY FILL OUT THE FORM AND SEND TO  
Fax: +49 2391 8105 375 or E-mail: info@mj-geruest.de

|                            |              |
|----------------------------|--------------|
| Company                    | Customer no. |
| Street                     | Phone        |
| Postal code, city, country | Fax          |
| Name of buyer              | E-mail       |

☐ ORDER ☐ INQUIRY

Order/Quotation please send ☐ by post ☐ by fax ☐ by e-mail

| PRODUCT DESCRIPTION | ARTICLE NO. | QUANTITY | UNIT PRICE € | TOTAL VALUE € |
|---------------------|-------------|----------|--------------|---------------|
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |
|                     |             |          |              |               |

ORDER VALUE €

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. In brief: place of business and jurisdiction is Plettenberg. Extended reservation of property rights until full payment of all our outstanding accounts are recieved. Our prices are ex work.

|                   |                   |
|-------------------|-------------------|
| Date of delivery  | Shipping method   |
| Delivery address: | Freight costs     |
|                   | Terms of delivery |
|                   | Terms of payment  |
|                   | MJ-Consultant     |
|                   | Stamp/Signature   |
|                   | Date              |



**MJ-GERÜST**  
Scaffolding Systems

**SCAFFOLDING MADE IN  
PLETTENBERG**

**WWW.MJ-SCAFFOLDING.COM**



### **OPTIMA**

Flexible façade scaffolding



### **OPTIMA METRIC**

Flexible façade scaffolding



### **OPTIMA TOP**

Flexible façade scaffolding



### **UNI-CONNECT**

Frame System 73/109



### **UNI**

Frame System 70/100



### **UNI TOP**

Frame System 65/100



### **COMBI**

Modular System



### **WALL AND ROOF**

Enclosure



### **ACCESSORIES**

Universal

**MJ-Gerüst GmbH** | Ziegelstraße 68 | 58840 Plettenberg Germany | [info@mj-geruest.de](mailto:info@mj-geruest.de)